

Quality & Affordability in Synergy

ZEKOKI®

ZKK-5100DG (100mm Angle Grinder)

SPECIFICATIONS

Input Power : 570W
No load Speed : 11,000/min.
Rated Frequency: 60Hz
Dia. of Wheel: Ø100mm



ZKK-4030SS (100mm Angle Grinder)

SPECIFICATIONS

Input Power : 720W
No load Speed : 11,000/min.
Dia. of Wheel: Ø100mm
Voltage: 220V
Frequency: 60Hz



SLIDE SWITCH

ZKK-4031TS (100mm Angle Grinder)

SPECIFICATIONS

Input Power : 720W
No load Speed : 11,000/min.
Dia. of Wheel: Ø100mm
Voltage: 220V
Frequency: 60Hz



TOGGLE SWITCH

ZKK-9561PS (100mm Angle Grinder)

SPECIFICATIONS

Disc Diameter : 100mm
No Load Speed : 11000/min.
Input Power : 840W
Voltage : 220V
Frequency : 60Hz



PADDLE SWITCH

ZKK-8100GWS (100mm Angle Grinder)

SPECIFICATIONS

Disc Diameter : 100mm
Input Power : 720W
Rated Voltage : 220V
Rated Frequency : 60Hz
No Load Speed : 3500-10000r/min



VARIABLE SWITCH

ZKK-10100DG (100mm Angle Grinder)

SPECIFICATIONS

Input Power : 1050W
Rated Voltage : 220V
No-load Speed : 10000r/min
Rated Frequency : 60Hz



ZKK-3550LS (355mm Cut-off Machine)

SPECIFICATIONS

Power Input : 2400W
Rated Voltage : 220V
No-load Speed : 3800r/min
Rated Frequency : 60Hz



ZKK-3550CS (355mm Cut-off Machine)

SPECIFICATIONS

Voltage / Frequency : 220V/60Hz
Input Power : 1800W
No load Speed : 3700r/min
Wheel Size : 355mm



ZKK-2550MS (255mm Miter Saw)

SPECIFICATIONS

Voltage / Frequency : 220V/60Hz
Input Power : 1800W
No load Speed : 6000r/min
Wheel Size : 255mm



ZKK-0810CH (5-kg Demolition Hammer)

SPECIFICATIONS

Blows Per Minute : 2,900 BPM
Impact Energy(ft.lbs.) : 5.6
Impact Energy(Joules) : 7.6
Amps : 8.3
Vibration(m/s) : 8
Bit Type : 3/4" hex-21/32" round
Overall Length : 16-5/8"
Net Weight : 12.8 lbs.



ZKK-1100RE (10-kg Demolition Hammer)

SPECIFICATIONS

Input Power : 1500 W
Max. Impact Energy : 6 - 25 J
Weight : 10.1 kg
Length : 570 mm
Height : 270 mm
Tool Holder : SDS-Max
Impact Rate at Rated Speed : 900 - 1890 bpm



ZKK-6500DH (15-kg Demolition Hammer)

SPECIFICATIONS

Power Input: 1,240W
Full Load Impact Rate: 1,400rpm
Weight: 15kg



ZKK-1000VC (10L Vacuum Cleaner)

SPECIFICATIONS

Function : Vacuum Cleaner
Capacity : 10L
Power : 900W
Voltage : 220V~240V
Height : 41cm
Tank Diameter : 36cm
Mode of Cooling : Circulating air cooling
Air Flow Rate : 53L/S
Vacuum Suction : 230mbar
Length of the Cable : 7m
Hose Diameter : 32mm
Packing : 44x39x44cm



ZKK-1500VC (15L Vacuum Cleaner)

SPECIFICATIONS

Function : Wet & Dry
Capacity : 15L
Power : 1000W
Voltage : 220V
Height : 55cm
Tank Diameter : Ø345mm
Air Flow Rate : 48 L/S
Vacuum Suction : 210mbar
Length of the Cable: 7m
Hose Diameter : Ø36mm
Packing : 43 x 43 x 61 cm
Mode of Cooling : Circulating Air Cooling



* SOFT TUBE * STEEL TUBE * ROUND BRUSH * LONG CONNECTOR
* SHORT CONNECTOR * DUST VACUUMING HEAD * WATER
VACUUMING HEAD * LONG FLAT VACUUMING HEAD

ZKK-3000VC (30L Vacuum Cleaner)

SPECIFICATIONS

Function : Wet & Dry
Capacity : 30L
Power : 1000W
Voltage : 220V
Height : 76cm
Tank Diameter : Ø345mm
Air Flow Rate : 53 L/S
Vacuum Suction : 230mbar
Length of the Cable: 7m
Hose Diameter : Ø40mm
Packing : 43 x 43 x 81 cm
Mode of Cooling : Circulating Air Cooling



* SOFT TUBE * STEEL TUBE * ROUND BRUSH * LONG CONNECTOR
* SHORT CONNECTOR * DUST VACUUMING HEAD * WATER
VACUUMING HEAD * LONG FLAT VACUUMING HEAD

ZKK-6000VC (60L Vacuum Cleaner)

SPECIFICATIONS

Function : Wet & Dry
Capacity : 60L
Power : 2000W
Voltage : 220V
Height : 90cm
Tank Diameter : Ø440mm
Air Flow Rate : 106 L/S
Vacuum Suction : 250mbar
Length of the Cable : 8m
Hose Diameter : Ø40mm
Packing : 63.5 x 56 x 99 cm
Mode of Cooling : Circulating Air Cooling



* SOFT TUBE * STEEL TUBE * ROUND BRUSH * LONG CONNECTOR
* SHORT CONNECTOR * DUST VACUUMING HEAD * WATER
VACUUMING HEAD * LONG FLAT VACUUMING HEAD

ZKK-1200PW (100 Bar Pressure Washer)

SPECIFICATIONS

Motor Power (W) :1200
 Voltage(V) : 220
 Frequency(Hz) : 60
 Motor Type/Size : 7630
 Material of Motor Wires : Aluminum
 Technical Avg. Lifetime : 75
 Axial/Pump Type : KLO3
 Pump Head Material : Aluminum
 Technical Pump Outlet Pressure : 70 +/-7
 Water Flow(L/H and L/min) : 300(5 +/-0.5)
 Self Priming Function/Draw Water : Yes
 Recommended Max Pressure(bar) : 100



ZKK-1440PW (Pressure Washer)

SPECIFICATIONS

Voltage : 220V
 Frequency : 60Hz
 Input Power : 1400W
 Protection Class : II
 Degree of Protection : IPX5
 Rated Pressure : 7.5MPa
 Allowable Pressure : 11MPa
 Rated Flow : 5.1L/min
 Max. Flow : 7.0L/min
 Max. Inlet Pressure : 0.7MPa
 Sound Pressure Level : LpA=75.2dB(A)
 Sound Power Level : LwA=87.8dB(A)
 Vibration Value : ah=1.3m/S²



ZKK-4180PW (Pressure Washer)

SPECIFICATIONS

Voltage : 220V
 Frequency : 60Hz
 Input Power : 1400W
 Protection Class : I
 Degree of Protection : IPX5
 Rated Pressure : 7.0MPa
 Allowable Pressure : 10MPa
 Rated Flow : 7.5L/min
 Max. Flow : 8.0L/min
 Max. Inlet Pressure : 0.7MPa



ZKK-8200RB (82mm 1mm Planer)

SPECIFICATIONS

Input Power: 600W
 Planing Width: 82mm(3-1/4")
 Planing Depth: 1mm
 No load Speed: 16,000 rpm
 Net Weight: 2.5kg



Accessories Included:
 -sharpening holder assembly
 -blade gauge assembly
 -socket wrench
 -edge fence

ZKK-8200HD (82mm 3mm Planer)

SPECIFICATIONS

Width Cutter : 82mm
 Cut-depth : 3mm
 No-Load Speed : 16000r/min
 Rated Input Power : 750W
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-9111HD (110mm 2mm Planer)

SPECIFICATIONS

Width Cutter : 110mm
 Cut-depth : 2mm
 No-Load Speed : 16000r/min
 Input Power : 840W
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-0600JS (Jigsaw)

SPECIFICATIONS

Cutting Capacity : 90mm
 No Load Speed : 0-3100rpm
 Input Power : 650W
 Rated Voltage : 220V
 Frequency : 60Hz



ZKK-1050RC (185mm Circular Saw)

SPECIFICATIONS

Input Power : 1050W
 No load Speed : 4700r/min
 Rated Frequency: 60Hz
 Dia. of Wheel: Ø185mm



ZKK-3612XR (12mm Router)

SPECIFICATIONS

Input Power : 1600W
 Chuck Diameter: 12mm
 No Load Speed : 23000r/min
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-3709ET (6mm Trimmer 530W)

SPECIFICATIONS

Input Power : 530W
 Chuck Diameter: 6mm
 No Load Speed : 35000r/min
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-4511FS (1/4 Sheet Palm Sander)

SPECIFICATIONS

Sanding Pad : 110x100mm
 No Load Speed : 12,000r/min.
 Input Power : 170W
 Voltage : 220V
 Frequency : 60Hz



ZKK-3710FS (1/3 Sheet Orbital Sander)

SPECIFICATIONS

Pad Size : 180x90mm
 Rated Voltage : 220V, 60Hz
 Input Power : 180W
 No-load Speed : 10000r/min



ZKK-0635R (6.5mm Electric Drill)

SPECIFICATIONS

Drill Capacity : 6.5mm
 Input Power : 380W
 No Load Speed : 0-3000r/min
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-1045R (10mm Electric Drill)

SPECIFICATIONS

Drill Capacity : 10mm
 Input Power : 420W
 No Load Speed : 0-4200r/min
 Rated Voltage : 220V
 Rated Frequency : 60Hz



ZKK-1500HD (Impact Drill)

SPECIFICATIONS

Drill Capacity : 13mm
 No load Speed : 0-2600r/min.
 Input Power : 550W
 Voltage: 220V
 Frequency: 60Hz



ZKK-1670HD (Cylindrical Impact Drill)

SPECIFICATIONS

Rated Voltage : 220V~60Hz
 Input Power : 710W
 No-load Speed : 0-3200r/min
 Drill Diameter : 16mm



ZKK-1670HDK (Impact Drill Kit)

SPECIFICATIONS

Rated Voltage : 220V~60Hz
 Input Power : 710W
 No-load Speed : 0-3200r/min
 Drill Diameter : 13mm



ZKK-2050RH (20mm Rotary Hammer)

SPECIFICATIONS

Input Power : 500W
 Power Out : 300W
 No-load RPM : 0-850min-1
 Impact Rate : 0-3900/min
 Impact Energy per Stroke : 1.5J
 Tool Holder : SDS-Plus
 Stone : 20mm
 Granite : 20mm
 Wood : 30mm
 Steel : 13mm
 Weight (w/out acc.): approx. 2.3kg

BOREMASTER

More than just an Impact Drill



ZKK-2680RH (26mm ROTARY HAMMER)

SPECIFICATIONS

Input Power : 800W
 No Load RPM : 0-1100min-1
 Tool Holder : SDS-Plus
 Wood : 30mm
 Steel : 13mm



"QUICK-RELEASE KEYLESS CHUCK"
 FOR METAL AND WOOD DRILLING

ZKK-3050 (50mm ROTARY HAMMER)

SPECIFICATIONS

Input Power : 1500W
 No Load Speed : 320min⁻¹
 Impact Rate : 3100min⁻¹
 Impact Energy : 15J
 Voltage : 220V
 Frequency : 60Hz



ZKK-2000HG-B (Hot Air Gun)

SPECIFICATIONS

Voltage : 230V~60Hz
Power Consumption Max : 2000W

WITH SPECIAL COOLING-OFF SETTING

Setting I : 25°C 350 l/min.
Setting II : 350°C 350 l/min.
Setting III : 550°C 500 l/min.



ZKK-1101RB (Blower)

SPECIFICATIONS

Continuous Rating Input : 600W
Air Volume : 0-2.8m³/min
Air Pressure : 0-5.5kpa (0-560mm H₂O)
No-load Speed (rpm) : 0-16,000
Overall Length : 480mm (18-7/8")
Net Weight : 1.7kg (3.7lbs)
Power Supply Cord : 2.5m (8.2ft)



ZKK-1200RP (180mm Polisher)

SPECIFICATIONS

No-Load Speed : 600-3000r/min
Input Power : 1200W
Rated Voltage : 220V
Rated Frequency : 60Hz



ZKK-3215BG (Bench Grinder 250W)

SPECIFICATIONS

Voltage : 220V~60Hz
Input Power : 250W (1/3HP)
No-load Speed : 3350min⁻¹
Wheel Size : 150x16x12.7mm (6")



ZKK-3220BG (Bench Grinder 550W)

SPECIFICATIONS

Voltage : 220V~60Hz
Input Power : 550W (3/4HP)
No-load Speed : 3350min⁻¹
Wheel Size : 200x20x32mm (8")



ZKK-4113DP (13mm Drill Press 250W)

SPECIFICATIONS

Drilling Capacity (mm) 1.5-13
Motor Power (W) 250(1/3HP)
Spindle Travel (mm) 50
Spindle Taper B16
Speed of Spindle 5
Rotary Radius of Table (mm) 104
Table Size (mm) 160x160
Base Size (mm) 290x290
Max Distance Bet. Spindle Tip & Column (mm) 210
Max Distance Bet. Spindle Tip & Base (mm) 300
Dia of Column (mm) Ø46
Total Overall Dimension (mm) 440x250x580



ZKK-4116DP (16mm Drill Press 375W)

SPECIFICATIONS

Drilling Capacity (mm) 3-16
Motor Power (W) 375(1/2HP)
Spindle Travel (mm) 60
Spindle Taper B16
Speed of Spindle 12
Rotary Radius of Table (mm) 127
Table Size (mm) 190x190
Base Size (mm) 340x205
Max Distance Bet. Spindle Tip & Column (mm) 420mm
Max Distance Bet. Spindle Tip & Base (mm) 600mm
Dia of Column (mm) Ø58
Total Overall Dimension (mm) 580x330x860



ZKK-6116DP (16mm Drill Press 550W)

SPECIFICATIONS

Drilling Capacity 16mm
Power 550W(3/4HP)
Spindle Travel 80mm
Spindle Taper MT2-B16
Swing 330mm
Table Size(mm) 290
Base Size(mm) 420x250
Column Diameter 70mm
Height(mm) 980
Packing Size 780x450x280
N.W/G.W(kg) 38/40




ZKK-6120DP (20mm Drill Press 750W)

SPECIFICATIONS

Drilling Capacity 20mm
Power 750W(1HP)
Spindle Travel 80mm
Spindle Taper MT2-B22
Swing 346mm
Table Size(mm) 290x290
Base Size(mm) 460x270
Column Diameter 70mm
Height(mm) 1600
Packing Size 1140x500x300
N.W/G.W(kg) 61.5/64.5



ZEKOKI ACCESSORIES

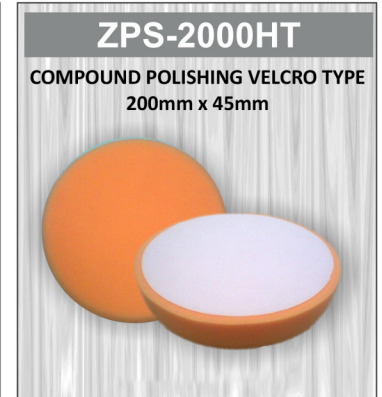

ZEKOKI ARMATURES

HEAVY DUTY



MULTI-FUNCTION BLADES



Z-5501
STANDARD DOUBLE -BREAK SAW BLADE



Z-5502
STANDARD STRAIGHT SAW BLADE



Z-5503
STANDARD PRECISE SAW BLADE



Z-5506
STANDARD STRAIGHT SAW BLADE



Z-5505
STANDARD STRAIGHT SAW BLADE



Z-5514
STANDARD STRAIGHT SAW BLADE



Z-5508-2
FLEXIBLE SCRAPER



Z-5601
HALF CIRCULAR DIAMOND GRINDING DISC



Z-5603
TRIANGLE CARBIDE GRINDING DISC



Z-5711
TRIANGLE SAND DISC WITH ALUMINUM BOTTOM



Z-5511
HALF CIRCULAR SAW BLADE



Z-5801
SANDING PAPER SET RED (5PCS)



Z-5802
SANDING PAPER SET GREY (5PCS)

PLANER BLADES



MODEL	SIZE	FOR MAKITA	FOR HITACHI	FOR KEN	FOR BOSCH	FOR ZEKOKI
ZKK-PBM314	3-1/4" (82mm)	1900B, 1923B, 1100 1125, 1101	P20ST	1982	GHO 20-82	ZKK-8200RB, ZKK-8200RA ZKK-8200HD
ZKK-PBM438	4-3/8" (110mm)	1911B				ZKK-9111HD
ZKK-PBM314TCT	3-1/4" (82mm)	1900B, 1923B, 1100 1125, 1101	P20ST	1982	GHO 20-82	ZKK-8200RB, ZKK-8200RA ZKK-8200HD
ZKK-PBM438TCT	4-3/8" (110mm)	1911B				ZKK-9111HD

* PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
*REVISED02A: 3-1-2023

Circular Saw Blade for Wood



CODE	DIAMETER & TEETH NO.	BORE	BUSHINGS
ZKK-CSBW-040040	105mm40T	1"	5/8", 3/4"
ZKK-CSBW-071440	7-1/4"40T	1"	5/8", 3/4"
ZKK-CSBW-071460	7-1/4"60T	1"	5/8", 3/4"
ZKK-CSBW-100030	10"30T	1"	5/8", 3/4"
ZKK-CSBW-100040	10"40T	1"	5/8", 3/4"
ZKK-CSBW-120030	12"30T	1"	3/4"
ZKK-CSBW-120040	12"40T	1"	3/4"
ZKK-CSBW-140030	14"30T	1-1/8"	1"
ZKK-CSBW-140040	14"40T	1-1/8"	1"
ZKK-CSBW-160030	16"30T	1-1/8"	1"
ZKK-CSBW-160040	16"40T	1-1/8"	1"



Circular Saw Blade for Aluminum

CODE	DIAMETER & TEETH NO.	BORE	BUSHINGS
ZKK-CSBA-100100	10"100T	1"	5/8", 3/4"
ZKK-CSBA-100120	10"120T	1"	5/8", 3/4"

CUTTING & GRINDING DISC

FLAT CUT-OFF FOR METAL TYPE 41



CODE	SIZE	GRIT
ZKK-COW-105	105x1x16mm	A46T
ZKK-COW-100	100x2x16mm	A46T
ZKK-COW-125	125x1.2x22mm	A46T
ZKK-COW-180	180x3x22mm	A30T
ZKK-COW-355	355x3x25.4mm	A30T

GRINDING DISCS FOR METAL TYPE 27



ZKK-DCW-100	100x6x16mm	A24T
ZKK-DCW-125	125x6x22mm	A24T
ZKK-DCW-180	180x6x22mm	A24T

DIAMOND CUTTING WHEEL



CODE	DESCRIPTION	SIZE	RPM
ZKK-DCWS-105	SEGMENTED DIAMOND BLADE	107x8x1.4x20/16	14,500/min



ZKK-DCWC-105	CONTINUOUS DIAMOND BLADE	105x7x1.4x20/16	14,500/min
--------------	--------------------------	-----------------	------------



ZKK-DCWT-105	TURBO DIAMOND BLADE	105x8x1.8x20/16	14,500/min
--------------	---------------------	-----------------	------------



ZKK-DCWT-105U	SUPER THIN TURBO DIAMOND BLADE	105x5x1.2x20/16	14,500/min
---------------	-----------------------------------	-----------------	------------



ZKK-DCWT-105PF	FAST CUT SUPER TURBO DIAMOND BLADE	105x8x1.4x20/16	14,500/min
----------------	---------------------------------------	-----------------	------------



ZKK-DCWS-105T	TURBO SEGMENTED DIAMOND BLADE	105x8x2.0x20/16	14,500/min
---------------	----------------------------------	-----------------	------------



ZKK-DCWS-125	SEGMENTED DIAMOND BLADE	125x8x1.9x22.23/20	12,250/min
--------------	-------------------------	--------------------	------------



ZKK-DCWS-180	SEGMENTED DIAMOND BLADE	180x10x2.4x25.4/22.23	8,500/min
--------------	-------------------------	-----------------------	-----------



ZKK-DCWS-355	SEGMENTED DIAMOND WHEEL LASER WELDED	355x8x21Tx27
--------------	---	--------------

CUP WHEEL



ZKK-DGWT-105
100x16mm
Turbo Cup Diamond Wheel



ZKK-DGWT-105P
100x5x20/16mm
Segmented Turbo Cup Wheel



Model	ZKK-500
Type	2-Stroke
Displacement(cc)	40.2
Engine	ZKK-EC04
Engine Power(kw)	1.45
Max. Speed(rpm)	7,000
Carburetor Type	Float
Fuel Tank Capacity(ml)	850
Engine Oil Capacity(ml)	800
Tube Diameter(mm)	28
Gross Weight	4.2kg



Model	ZKK-600
Type	Gas Grasscutter
Displacement(cc)	40.2
Engine	ZKK-TD40
Engine Power(kw)	1.45
Max. Speed(rpm)	7,000
Carburetor Type	Float
Fuel Tank Capacity(ml)	850
Engine Oil Capacity(ml)	800
Tube Diameter(mm)	28
Gross Weight	4.2kg



Model	ZKK-1000
Type	4-Stroke
Displacement(cc)	35.8
Engine	ZKK-GX35
Engine Power(kw)	0.85
Max. Speed(rpm)	7,000
Carburetor Type	diaphragm
Fuel Tank Capacity(ml)	800
Engine Oil Capacity(ml)	800
Tube Diameter(mm)	28
Gross Weight	4.2kg



Model	ZKK-1200
Type	4-Stroke
Displacement(cc)	35.8
Engine	ZKK-EH035
Engine Power(kw)	0.85
Max. Speed(rpm)	7,000
Carburetor Type	diaphragm
Fuel Tank Capacity(ml)	1000
Engine Oil Capacity(ml)	800
Tube Diameter(mm)	28
Gross Weight	4.2kg

ZKK-200 (WATER PUMP)

SPECIFICATIONS

Suction x Delivery Dia: 25x25mm
 Max. Delivery Volume : 250 l/min
 Max. Total Head : 25M
 Max. Engine Output : 2HP
 Fuel Tank Capacity : 800ml
 Engine Oil Capacity : 100ml



ZKK-250 (KNAPSACK SPRAYER)

SPECIFICATIONS

TANK CAPACITY : 25L
 RATED DISCHARGE : 8L/MIN
 MAX PRESSURE : 365PSI



ZKK-WCK (Wheat Cut Kit)

COMPLETE WITH
 STAINLESS STEEL GUARD,
 STEEL BRACKET AND
 10X80T BLADE



ZKK-KS16 (Knapsack Sprayer)

**16
Liters**

NEW

- Robust construction
- Heavy duty trigger control
- Inline filter to prevent nozzle clogging
- Heavy duty poly piston
- Wide carry straps for easier and more comfortable carrying



ZKK-KS20 (Knapsack Sprayer)

**20
Liters**

NEW

- Robust construction
- Heavy duty trigger control
- Inline filter to prevent nozzle clogging
- Heavy duty poly piston
- Wide carry straps for easier and more comfortable carrying



ZKK-KS16D (Knapsack Sprayer)

**16
Liters** **DUAL**

NEW

- Can be battery operated / manual operated
- Robust construction
- Heavy duty trigger control
- Inline filter to prevent nozzle clogging
- Heavy duty poly piston
- Wide carry straps for easier and more comfortable carrying



ZKK-300 (Inboat Motor Set)



Engine Power 2HP
 Engine Speed 7000rpm

*PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

*REVISED07A: 3-1-2023

Quality & Affordability in Synergy



WELDING MACHINES

99.99% Copper Core



norms	ZX1-160B Cu	ZX1-175B Cu	ZX1-200B Cu	ZX1-300B Cu	ZX1-200A Cu	ZX1-315A Cu	ZX1-500A Cu
rated output current A	160	175	200	300	200	315	500
rated input voltage	220	220	220	220	220	220	220 / 440
rated frequency (HZ)	60	60	60	60	60	60	60
rated input capacity (KVA)	8	12	14	22	16	24	40
No-load voltage (V)	50	56	60	64	62	68	72
rated duty cycle (%)	20	40	40	40	40	40	40
rated duty voltage (V)	24.4	27	33	33	33	33	40
current range (A)	65-160	40-175	60-200	70-300	45-200	60-315	100-500
dia of applicable electrode (mm)	ϕ 2.0 - ϕ 3.2	ϕ 1.6 - ϕ 3.2	ϕ 2.0 - ϕ 4.0	ϕ 2.5 - ϕ 6.0	ϕ 1.6 - ϕ 4.0	ϕ 2.0 - ϕ 6.0	ϕ 2.5 - ϕ 8.0
net weight (KGS.)	28	33	42	60	70	97	133

WATER PUMP



CLEAN WATER PUMP
(BRASS IMPELLER)



SELF-PRIMING PUMP
(STAINLESS IMPELLER)



Model	ZKK-QB60
HP	0.5
Voltage	220V
Phase	1
RPM	3450
µf	8
Ampere	2.5
Suction Max.	9m
Max. L/M	36
Max. Head	36m

ZKK-JET60L	ZKK-JET80L	ZKK-JET100L
0.5	0.75	1.0
220V	220V	220V
1	1	1
3450	3450	3450
12	16	20
3.5	4.5	6.2
9m	9m	9m
43	48	54
38m	46m	52m

ZKK-JET120L	ZKK-JET140L
1.5	2.0
220V	220V
1	1
3450	3450
30	40
7.5	9
9m	9m
85	95
60m	72m

Quality & Affordability
in Synergy

ZEKOKI®



INVERTER WELDING MACHINE

	ZKK-215MA	ZKK-275MA	ZKK-315MA	ZKK-375MA
Power Voltage (V)	1 Phase AC220V±15% 60Hz			
Output Current (A)	20-215	20-275	20-315	20-375
Duty Cycle (%)	40			56
Efficiency (%)	85			
Power Factor	0.73			
Insulation Grade	F			
Housing Protection Grade	IP21S			

*PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
REVISED01: 8-9-2023