



### DIGITAL BENDING MACHINE

Model	DB32
Voltage	220V~60Hz
Power Input	1700W
No Load min <sup>-1</sup>	3.5
Max. Capacity	38mm(1-1/2")
Soft Start	With
Dimensions	630x230x183mm
Net Weight	14kg(30.86 Lbs)
Standard Accessories	Tripod, Velcro Strap



### TILE SAW W/ DIAMOND BLADE

Model	TS9
Motor Type	Single Phase AC Induction
Power Output	800W
Voltage	220~60Hz
No Load min <sup>-1</sup>	3600
Max. Blade Diameter	230mm(9")
Blade Bore	25.4mm(1")
Bevel Capability	0-45 deg.
Max. Cutting Depth-straight	48mm(1-7/8")
Max. Cutting Depth at 45 deg.	37mm (12")
Table Cutting Width-Left	305mm(12")
Table Cutting Width-Right	147mm(5-3/4")
Dimensions	660x595x320mm
Net Weight	14.7kg(32.41 Lbs)
Standard Accessories	: Diamond Blade, Parallel Cutting Guide, Angle Guide Plate, M8 Combination Wrench, M19 Combination Wrench



### METAL CUTTING CIRCULAR SAW W/O SAW BLADE

Model	CS200
Power Input	1700W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	3700
Bevels	0 to 45 degrees
TCT Saw Blade	200mm(8in.) <i>"Blade not included"</i>
Arbor	30mm(1-3/16in.) or 25.4mm(1 in.)
Cutting Capacities	Straight cut: 67mm (2-5/8 in.) 45 Degree Bevel: 42mm(1-5/8in.)
Dimensions	368x284x330mm
Net Weight	6.3Kgs(13.6 Lbs)
Standard Accessories	Side Handle, Hex Wrench M6



### RECIPROCATING SAW WITH BLADE FOR METAL

Model	RS130B
Power Input	1600W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	1000-2800
Stroke	26mm(1")
Max. Capacity	130mm
Speed Control	With
Quick Release Saw Blade Replacing System	With
Soft Start & Overload Protection	With
Dimensions	470x155x97mm
Net Weight	3.70kgs(8.14 Lbs)
Standard Accessories	Hex Wrench M6



### METAL CUTTING CIRCULAR SAW W/O SAW BLADE

Model	CS320
Power Input	1800W
Voltage	220~60Hz
No Load min <sup>-1</sup>	1700
Max Blade Diameter	320mm <i>"Blade not included"</i>
Arbor Hole Diameter	25.4mm(1 inch)
Max Cutting Depth	128mm (121mm On Guide Rail)
Soft Start & Overload Protection	With
Dimensions	500x342x355mm
Net Weight	8.4kg(18.52 lbs)
Standard Accessories	6mm Hex Wrench, Side Handle



### WET/DRY VACUUM DUST EXTRACTOR

Model	DE25
Power Input	1200W
Voltage	220V~60Hz
Max. Airflow	4000 L/min (141.3 CFM)
Max. Suction (lift)	25kPa(250mbar, 100.4 inches of water)
Protection	IP44
Max. Dust Capacity	25L(6.6 gallons)
Max. Connected Power Tool	2200W
Soft Start	With
Dimensions	598x408x420mm
Net Weight	12.9kg(28.4 Lbs)
Standard Accessories	: Hose(4m), Pleated Main Filters(pair) Washable Diaphragm Filter, Cloth Dust Bag w/Hook & Loop Closure



### METAL CUTTING CIRCULAR SAW W/O SAW BLADE

Model	DS2300
Power Input	1600W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	5000
Bevel Capability	0-45 deg.
Max. Blade Diameter	230mm (9")
Available Arbor Hole Diameters*	30mm,25.4mm(1in.),20mm
Max. Cutting Straight	85mm (3-3/8")
Depth 45° Bevel	60mm (2-3/8")
Soft Start & Overload Protection	with
Dimensions	428mm x 246mm x 311mm
Net Weight	7.7kg (16.98 lbs)
Standard Accessories	Hex Wrench M5



### DIE GRINDER (Low Speed Mode)

Model	DG50L
Power Input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	2,700-6,000
Collet	6mm
Max. Wheel Diameter	50mm
Dimensions	510x72x77mm
Soft Start & Overload Protection	With
Net Weight	2.0kg(4.41 Lbs)
Standard Accessories	Wrench 19x25mm 2pcs.

### OPTIONAL ACCESSORIES



Aluminum Guide Rail 174x800mm  
Aluminum Guide Rail 174x1400mm

**AGP**<sup>®</sup>



Guide Rail Connector No.0299-0106-00000-001  
Quick Release Clamp No.305-00179-000-001

www.agp-powertools.com



### STRAIGHT GRINDER

Model	SG6
Power Input	1500W
Voltage	220~60Hz
No Load min <sup>-1</sup>	1600-4800
Spindle	M14(w/20mm Tool Holder)
Max. Wheel Diameter	150mm(6")
Dimensions	566x80x96mm
Soft Start & Overload Protection	With
Net Weight	3.4kg(6.61Lbs)
Standard Accessories	Face Spanner Wrench, Mandrel Arbor, Wrench M17, M2, M5

### DRAIN CLEANING MACHINE



Model	D65
Power Input	600W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	580
Dimensions	353x260x325mm
Net Weight	19.3kgs(42.55 Lbs)
Standard Accessories :	
	Basket with 3 Spiral Cables 16mmx5m(L) or Basket with 3 Spirals Cables 22mmx5m(L), Funnel Auger 31mm(Ø16) or 55mm(Ø22), Straight Auger 16mm(Ø16) or 22mm(Ø22), Bulbous Auger 27mm(Ø16) or 40mm(Ø22), Forked Cutter, Carbide Cutter 16mm or Carbide Cutter 22mm, Chuck for 16mm Spiral Cable only, Cable Joint Separator, Gloves, Hose 1M



### ELECTRIC MIXER/ DRILL

Model	EV21
Power Input	1100W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	800
N-m	12.6
Gear	1 Speed
Spindle Thread	1/2"-20unf
Max. mixing Paddle Diameter	120mm(4-11/16")
Drilling Capacity	Steel:13mm, Wood:35mm
Switch	Single Speed
Dimensions (Motor unit Only)	300x95x410mm
Net Weight	2.9kg(6.39 Lbs)
Standard Accessories	M14 Adaptor

Paddle & Coupler  
TS12014590 Mixing Paddle with Adaptor  
**List Price: Php 1,500.00**

### BUCKET MIXER



Model	AM5000
Power Input	750W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	65
Max. Torque	105n-m
Motor	AC Induction Motor, Class F
Max. Capacity	50L
Protection	IP 44
Dimensions	940x580x780mm
Net Weight(including bucket)	31.2kg(68.78 Lbs)
Standard Accessories	Non-reinforced 50L bucket, Agitator



### 4 SPEED MAGNETIC DRILLING MACHINE

Model	MD750/4
Power Input	2000W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	Speed 1 : 150/90 Speed 2 : 200/120 Speed 3 : 300/180 Speed 4 : 380/230
Max. Capacity	Dia. X Depth of cut : 75x50mm(3"x2") Dia. X Depth of MT3 twist Drill Bit : 32x150mm(1-1/4"x4-7/8") Dia. X Depth of MT3 Chuck Adaptor with Twist Drill Bit : 16x110mm(5/8"x4-1/2") Dia. X Depth of Taps : 25.4x40mm(1"x1-9/16")
Magnetic Adhesion	32,000N
Overload Protection	24.8 Kgs(64.67 Lbs)
Net Weight	Wrench M8, Hex.key M2.5 & M4, Chip Guard Kit,
Standard Accessories	Coolant tank Kit, Safety Chain, Drift



### 4 SPEED MAGNETIC DRILLING MACHINE

Model	MD120/4
Power Input	2000W
Voltage	220V/60Hz
No Load min <sup>-1</sup>	Speed 1 : 35-120, Speed 2 : 70-220 Speed 3 : 80-250, Speed 4 : 140-450
Max. Capacity	Dia. X Depth of cut with 31-7mm(1-1/4") Weldon Shank Annular Cutter Arbor : 120mm x 50mm Dia. X Depth of cut with 19.05mm(3/4") Weldon Shank Annular Cutter Arbor : 120mm x 50mm Dia. X Depth of cut with Quick Release Arbor : 60mm x 50mm Dia. X Depth of MT3 Twist Drill Bit : 32mm x 200mm Dia. X Depth of MT3 Chuck Adaptor with Twist Drill Bit : 16mm x 120mm Dia. X Depth of Taps : 25.4mm x 40mm : 32mm x 40mm

Magnetic Adhesion	32,000N
Overload Protection	with
Net Weight	29.4kg(64.82 lbs)
Standard Accessories:	Wrench M8, Hex Key M2.5 & M5, Chip Guard Kit, Coolant Tank Kit, Safety Chain, Drift, 31.75 Annular Cutter Set, Screw Arbor, 19.05 Annular Cutter Set Screw Arbor

### DRYWALL SANDER



Model	HS225
Power Input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	650-1450
Sanding Disc Diameter	225mm
Soft Start	With
Dimensions	515x258x214mm
Net weight	3.0kg(6.61 Lbs)
Standard Accessories	Bayonet Adaptor End

### HAND-HELD DRYWALL SANDER



Model	GS9FSE	GS9FE
Power Input	550W	550W
Voltage	220V~60Hz	220V~60Hz
No Load min <sup>-1</sup>	650-1800	650-1800
Full Load min <sup>-1</sup>	380-950	380-950
Grinding Disc	Ø225mm (8-7/8 in.)	Ø225 mm (8-7/8 in.)
Soft Start	With	With
Dimensions	1058x260x310mm	1580x260x350mm
Net Weight	3.8kg(8.38 Lbs)	4.7kg(10.36 Lbs)
Standard Accessories	Vacuum Hose 4M, Bail Handle, Carry Bag, Velcro Strap	



www.agp-powertools.com





ROTARY POLISHER	
Model	RP160
Power Input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	1000-2400
Spindle	M14 or M16
Max. Recommended Pad Diameter	150mm
Soft Start & Overload Protection	With
Dimensions	378x213x127mm
Net Weight	2.3kg(5.07 Lbs)
Standard Accessories	Side Handle



ROTARY POLISHER	
Model	: RP220
Power Input	: 1700W
Voltage	: 220V/60Hz
No Load r.p.m.	: 800~2400
Spindle	: M14
max. recommended pad diameter	: 180mm
Net Weight	: 3.2Kgs(7.04 Lbs)
Standard Accessories	: 7" Hook&loop backing pad M14, 150mm Foam polishing pad



STONE GRINDER	
Model	EP5L
Power Input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	1700-3700
Spindle	M14
max. Disc Diameter	125mm
Soft start & Overload Protection	With
Dimensions	303x72x80mm
Net Weight	2.2kgs (4.85 Lbs)
Standard Accessories	Side Handle, Inner & Outer Flanges, Lock Nut Wrench



STONE GRINDER	
Model	EP5LFB
Power input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	2100-4300
Spindle	M14 or 5/8"-11
Max. Disc Diameter	5" (125mm)
Soft Start & Overload Protection	With
Protection Class	Class I with PRCD/GFCI
Dimensions	303x72x80mm
Net Weight	2.8kgs(6.17 Lbs)
Standard Accessories	L-Hex Key, M2, PRCD/GFCI Interruptor, Inner & Outer Flanges, Lock Nut Wrench



STONE GRINDER	
Model	EP7FB
Power input	2200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	1000-2400
Spindle	M14 or 5/8"-11
Max. Disc Diameter	7" (180mm)
Soft Start & Overload Protection	With
Protection Class	Class I with PRCD/GFCI
Dimensions	500x210x200mm
Net Weight	6.0kg(13.23 Lbs)
Standard Accessories	Lock Nut Wrench, PRCD/GFCI Interruptor, Inner & Outer Flanges



LONG-REACH DIAMOND GRINDER	
Model	LG125
Power Input	1200W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	1700-3500
Length	1475mm
Max. Capacity	125mm
Arbor	22.23mm(7/8") or 25.4mm(1")
Soft Start & Overload Protection	with
Net Weight	3.8 Kgs(8.36 Lbs)not including Diamond Cup Disc
Standard Accessories	: Vacuum Hose 4M, Carry bag, Bail Handle, Face Spanner Wrench-78mm, M17 Wrench, Hex Key M6, 125mm Diamond Cup Disc(100/120 grit)



MITER SAW W/AC INDUCTION MOTOR	
Model	GP255S
Power Input	1600W
Voltage	220V/60Hz
No Load Speed	3000(50Hz), 3500rpm(60Hz)
Bevels	0 to 45 Degrees
Miters	0 to 45 Degrees
Blade	254mm (10in.)
Arbor	30mm(1-3/16in.) or 25.4mm(1in.)
Base Dimensions	460x450mm
Slide(GP-255S)	
Cutting Capacity:	90 Degree Miter:300mmx60mm(11-13/16x2-3/8in.) 45 Degree Miter:212mmx60mm(8-3/8x2-3/8in.)
Dimensions:	670mm x 490mm x 505mm
Net Weight	19.5kg
Standard Accessories	: TCT Saw Blade, Vise Set, Motor Brake, Vacuum Port M10 Open End Wrench, M12 Bevel Lock Lever, M24/27 Open-End Wrench, Hex Head Screw x2pcs, Flat Washer x1pc, Plastic Head Screw x1pc



www.agp-powertools.com



### 355mm(14") DRY-CUT METAL SAW

Model	DRC355
Power Input	2200W
Voltage	220V/60Hz
No Load rpm	1300
Max. Cutting Capacity:	
90 Deg.	Round Pipe: 132mm Square Stock: 120mm(W) x 120mm(H) Rectangular Stock :180mm(W) x 100mm(H)
Right Hand Miter	Round Pipe: 132mm Square Stock: 120mm(W) x 120mm(H) Rectangular Stock :180mm(W) x 100mm(H)
Left Hand Miter	25Deg. 80mm(W) x 120mm(H) 30Deg. 90mm(W) x 120mm(H) C-clamp required 35Deg. 80mm(W) x 120mm(H) C-clamp required 40Deg. 70mm(W) x 120mm(H) C-clamp required
Arbor	25.4mm(1")
Soft Start	with
Overall Dimensions	680mmx360mmx580mm
Net Weight	24.6kg(54.23Lbs)
Standard Accessories	4mmHex. Wrench, 6mmHex. Wrench, 8mmHex. Wrench, Chip Tray

### WALL CHASER without 7" BLADE

Model	CS180
Power Input	1800W
Voltage	220V~60Hz
No Load min-1	4100
Max. Blade Diameter	180mm(7in.) <i>"Blade not included"</i>
Channel Width	9~51mm(3/8~2in.)
Max. Cutting Depth	15~52mm(9/16~2-1/8in.)
Soft Start & Overload Protection	With
Dimensions	410x317x267mm
Net Weight	7.7 kg(16.92 Lbs)
Standard Accessories	: Spacers: 49.6x22.2x5mm(2pcs), 49.6x22.2x10mm(1pc), 49.6x22.2x12mm(1pc), 49.6x22.2x15mm(1pc) Side Handle, Hex Wrench M10, Vacuum hose End adaptor,

### STONE CUTTING CIRCULAR SAW w/out 7" DIAMOND BLADE

Model	SCS7
Power Input	1800W
Voltage	220V~60Hz
No Load min-1	5800
Arbor	22.23mm(7/8")
Max. Blade Diameter	180mm <i>"Blade not included"</i>
Max. Cutting Depth	55mm
Overload Protection	With
Protection Class	Class I with PRCD/GFCI
Dimensions	350x270x265mm
Net Weight	6.7kg(14.74 Lbs)
Standard Accessories	: Rubber Plug, Parallel Guide, Quick-release Water Hose coupling, M6 L-Hex Wrench, PRCD/GFCI Interruptor



Standard Accessories :  
M17 Combination Wrench,  
Guide Roller Set,  
Splash Guard Unit, Blade Guard Brush,  
PRCD/GFCI Interruptor

### CONCRETE SAW W/O DIAMOND BLADE

Model	C16
Power Input	3200W
Voltage	220V~60Hz
No Load min-1	3900
Blade Diameter <i>"Blade not included"</i>	405mm(16")
Arbor	25.4mm(1")
Max. Cutting Depth	150mm(6")
Protection Class	Class II with PRCD/GFCI
Dimensions	660mmx259mmx280mm
Net Weight	9.6kg(21.1 Lbs)

### CONCRETE VIBRATOR

Model	H42S
Voltage	100-250V~50-60Hz
Vibration Rate	12,500 vpm
Power Input	1200W
Motor Frequency	400Hz
Centrifugal Force	2489N
Vibrator Head Size	ø42mm x 300mm
Hose Size	ø36mm x 0.85mm
Protection	IP X7
Protection Class	Class I
Switch box Dimensions(LxWxH)	250mmx60mmx170mm
Net Weight	5.28kg(11.62Lbs)



H42S

### HOLE CUTTING DRILL

Model	: HC127
Power Input	: 1100W
Voltage	: 220~60Hz
No Load min-1	: 130
Max. Cutting Capacity	: 127mm
Pipe Mounting Capacity	: 32mm-203mm
Drill Chuck Capacity	: 1mm-16mm
Overload protection	: With
Overall Dimensions	: 319x270x302mm
Net Weight	: 14.5kg(31.9Lbs)not including Crank Handle
Standard Accessories	: 16mm(5/8")Chuck & Key, Crank Handle Set



Hole Cutter  
not included

### ELECTRIC BEVELER

Model	EB6
Power Input	1100W
Voltage	220V~60Hz
No Load min-1	3000-6000
Bevel angle	45deg.(optional 30 deg.)
Max. Bevel Height(45deg.)	6mm
Min. Diameter For Inside Bevels	20mm
Dimensions	308x344x273mm
Net Weight	4.3kg(9.48 Lbs)
Standard Accessories	: Torx Wrench T15, Hook Spanner Wrench, Spindle Lock Bar, 45 Deg. Tool Holder set, Square Carbide Insert 2pcs



www.agp-powertools.com



### BEVELER/DEBURRER

Model	EB12
Power Input	1800W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	2300-6500
Speed Wheel Settings	1/2/3/4/5/6: 2300/2600/3700/4800/5800/6500
Std. Bevel Angle	45 Deg.
Max. Chamfer Height	45 Deg. :10.6mm
Mini. Dia. for Inside Bevels	30mm
Soft Start & Overload Protection	with
Dimensions	485x192x150mm
Net Weight	6.35kg(14 Lbs)
Standard Accessories : 45Deg.Tool Holder Set, Square Carbide Inserts 6pcs. Torx Wrench T15, Hex Wrench M6, Hook Spanner Wrench, Spindle Lock Bar	



### ELECTRIC BEVELER

Model	EB24
Power Input	1100W
Voltage	220V~60Hz
No Load min <sup>-1</sup>	60Hz:3600
Angular adjustment	60 Deg. : 13.7mm 45 Deg. : 21.9mm 37.5 Deg. : 18.5mm 30 Deg. : 14.9mm 15 Deg. : 11.8mm
Dimensions	475x296x247mm
Net Weight	19.3kg(42.46 Lbs)
Standard Accessories : Milling Disc 2pcs, Square Carbide Inserts 12pcs, Hex Wrench M8 & M3, M32 Combination Wrench, Open End Wrench 27x24mm	



### DRUM SANDER

Model	DP100
Power Input	1200W
Voltage	220~60Hz
No Load min <sup>-1</sup>	1500-2800
Max. Wheel Diameter	100mm
Max. Wheel Width	100mm
Arbor	19mm double keyed x 100mm long
Soft Start & Overload Protection	With
Dimensions	394x198x195mm
Net Weight	3.5kg(7.71 Lbs)



### WRAPAROUND TUBE SANDER

Model	WS620
Power Input	1500W
Voltage	220~60Hz
No Load min <sup>-1</sup>	2300-6500
Surface speed	15-28m/sec
Max. Belt(L)x(W)	620x40mm
Dimensions	601x220x182mm
Soft start & Overload Protection	With
Net weight	4.8kg(10.58 Lbs)
Standard Accessories : Side Handle, Sandpaper Belt #60(40x620mm) Sandpaper Belt #100(40x620mm), Sandpaper Belt #180(40x620mm) Surface Conditioning Belt(40x620mm)	



### WRAPAROUND TUBE SANDER

Model	WS760
Power Input	1200W
Voltage	220~60Hz
No Load min <sup>-1</sup>	1600-3200
Surface speed	3~12m/sec.
Max. Belt(L)x(W)	760x40mm
Max. Pipe Diameter	180mm
Max Polishing Deg.	270
Soft start & Overload Protection	With
Dimensions	530x370x215mm
Net weight	3.1kg(6.83 Lbs)
Standard Accessories : Side Handle, Surface Conditioning Belt(40x760mm) Sandpaper Belt#120 grit(40x760mm)5pcs, Sandpaper Belt#220 grit(40x760mm)5pcs	



### FLOOR GUIDING TROLLEY FOR SM5 & SM7



Unit not included

### SCOURING MACHINE

Model	SM125
Power Input	1200W
Voltage	220~60Hz
No Load min <sup>-1</sup>	2800
Milling Head	125mm
Milling Depth	1-6mm
Dimensions	352x300x265mm
Net Weight	5.4kg(11.9 Lbs)
Standard Accessories	Side Handle, T-wrench 13mm Scarifier Wheel with Pyramid-Tip Cutter Discs, Wheel Puller Face Spanner Wrench-93mm(for scarifier Wheels), Vacuum Hose End Adapter

### Pyramid-Tip Cutter Discs (Standard) SM01250003 10T



Replacement Carbide  
Cutter Discs-(Set of 15)

**AGP**<sup>®</sup>


www.agp-powertools.com



### T-ARM SM-125

The T-Arm for the SM125 scouring machine allows the operator to work in an upright position for decreased fatigue and increased productivity.

Unit  
not included

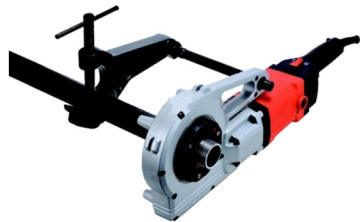

### PORTABLE THREADING MACHINE

Model	PT600
Voltage	220~60Hz
Power Input	1100W
No Load min <sup>-1</sup>	26
Full Load min <sup>-1</sup>	19
Max. Die Head	2" nominal(60.33mm)
Dimension	552x200x98mm
Net Weight	7.6kg(16.76 Lbs)
Standard Accessories	Adapter, Blocking Vise



### NPT RIDGID TYPE MANUAL PIPE THREADER SET

Set Number	305-03344-149-004
Thread Type	NPT
Die Type	Ridgid System
Size	1/2", 3/4", 1", 1-1/4" 1-1/2", 2
Max. Die Head	2" nominal (60.33mm)
Dimensions	740x132x57mm(not including Adapter and Die Head)
Net Weight	3.5kg(7.72 Lbs) not including Adapter and Die Head

### INDIVIDUAL DIE HEADS (Including Dies, Pre-Mounted)

Die Heads are standard octagon drive ans fit both PT600 Power Portable Threaders and Manual Pipe Threaders

Set Number	Thread Type	Die Type	Size
305-00147-000-020	NPT	RIDGID System	1/2"
305-00147-000-021	NPT	RIDGID System	3/4"
305-00147-000-022	NPT	RIDGID System	1
305-00147-000-023	NPT	RIDGID System	1-1/4
305-00147-000-024	NPT	RIDGID System	1-1/2
305-00147-000-025	NPT	RIDGID System	2"

### REPLACEMENT DIES (4 PIECES PER SET)

Set Number	Thread Type	Die Type	Size
305-00052-000-022	NPT	RIDGID System	1/2"
305-00052-000-023	NPT	RIDGID System	3/4"
305-00052-000-024	NPT	RIDGID System	1
305-00052-000-025	NPT	RIDGID System	1-1/4
305-00052-000-026	NPT	RIDGID System	1-1/2
305-00052-000-027	NPT	RIDGID System	2"

**AGP**<sup>®</sup>

www.agp-powertools.com



## ROTARY LASER LEVEL



Model	AGP-150 (High power)
Leveling accuracy	Horizontal: $\pm 15'$ / Vertical: $\pm 20'$
Self-leveling range	$\pm 5^\circ$
Measuring range	Diameter: 500m (Using the laser detector)
Spinning speed	0,60,120,300,600 r.p.m
Directional-scanning	0°, 10°, 45°, 90°, 180°
Setting slope	$\pm 5^\circ$ (Dual axis)
Light source	Laser Diode, wavelength 635nm
Down point	Accuracy: $\pm 1\text{mm}/1.5\text{m}$
Remote controlling Distance	Approximately 20m
Power Supply	DC 4.8-6V (NI-MH rechargeable)
Working Temperature	-10~+45 (14°F~113°F)
Water-proof	IP-54
Dimension	160(L)x160(W)x185(H)mm
Weight	2kgs



Model	AGP-160
Leveling accuracy	Horizontal: $\pm 15'$ / Vertical: $\pm 20'$
Self-leveling range	$\pm 5^\circ$
Measuring range	Diameter: 500m (Using the laser detector)
Spinning speed	0,60,120,300,600 r.p.m
Directional-scanning	0°, 10°, 45°, 90°, 180°
Setting slope	$\pm 5^\circ$ (Dual axis)
Light source	Laser Diode, wavelength 532nm
Down point	Accuracy: $\pm 1\text{mm}/1.5\text{m}$
Remote controlling Distance	Approximately 20m
Power Supply	DC 4.8-6V (NI-MH rechargeable)
Working Temperature	-10~+45 (14°F~113°F)
Water-proof	IP-54
Dimension	160(L)x160(W)x185(H)mm
Weight	2kgs

## ELECTRONIC AUTOMATIC LEVELING



Model	AGP-185 (High power)
Beam	4V1H1D
Light sources	635 nm laser diode / down point 650nm
Anti-dust & Anti-water	IP-54
Laser safety class	Class 2 / Class 2M for High power
Accuracy	$\pm 1\text{mm}/10\text{m}$
Self-leveling range	$\pm 5^\circ$
Working range	Radius 40~50m (with detector)
Power supply	4 x AA alkaline batteries/rechargeable batteries/ AC adaptor
Mounting thread	5/8"X11,ISO standard
Range of operating temperature	-10°C~+40°C
Instrument size	$\Phi 110 \times 205\text{mm}$
Instrument weight	1.4kg (including batteries)
Standard Accessory	Aluminum carrying case, Laser glasses, Battery charger, Alkaline battery, L-shaped acrylic plate, manual



Model	AGP-195
Beam	4V1H1D
Light sources	635 nm laser diode
Anti-dust & Anti-water	
Laser safety class	Class 2 / Class 3A
Accuracy	$\pm 1\text{mm}/7\text{m}$
Self-leveling range	$\pm 3^\circ$
Working range	Radius 25m (with detector)
Power supply	3 x AA alkaline batteries/rechargeable batteries
Mounting thread	5/8"X11,ISO standard
Range of operating temperature	-10°C~+40°C
Instrument size	$\Phi 88 \times 190\text{mm}$
Instrument weight	300g (including batteries)
Standard Accessory	Aluminum carrying case, Laser glasses, Alkaline battery, manual



## ELEVATOR TRIPOD

Model
ETP-189 (26cm)
ETP-195 (165cm)
EV-290 (180cm)
Thread : 5/8"

# AGP®

# SPRAYER



## TURBINE PAINT SPRAYER

Model	T328
Voltage	220~60Hz
Power Input	1400W
Turbine	3 Stage
Airflow	2800 l/min
Max. Working Pressure	0.41 bar (6psi)
Soft Start	With
Turbine Dimensions	325mm x 250mm x 325mm
Net Weight	8.9kg (19.62lbs)
Standard Accessories	Air Hose 6M, Gun with 1.3mm, Needle Nozzle Set

## ELECTRIC PISTON PUMP AIRLESS SPRAYERS



Model	: PM021LF
Motor Type	: DC Motor(TEFC)
Power Input	: 1000W
Voltage	: 220V~60Hz
Max. Tip Size	: 0.021in.
Max. Flow	: 2.1 L/min.(0.55gpm)
Max. Pressure	: 207 bar(3,000PSI)
Control	: Digital
Overload Protection	: With
Dimensions	: 420x300x550mm
Net Weight	: 23.4kgs(5.56 Lbs)

### Standard Accessories:

- \* Hose 1/4"x54'(16.5m)
- \* Gun with Tip Guard and Tip(0.017in.)
- \* Pump Filter w/one each 60&100 screens
- \* Special Multi-Purpose Wrench
- \* Flexible Suction Hose
- \* Throat Seal Oil(100ml Squeeze Bottle)
- \* Tommy Bar

## ELECTRIC PISTON PUMP AIRLESS SPRAYERS



Model	: PM025
Motor Type	: DC Motor(TEFC)
Power Input	: 1300W
Voltage	: 220V~60Hz
Max. Tip Size	: 0.025 in.
Max. Flow	: 2.7 l/min.(0.71gpm)
Max. Pressure	: 207 bar(3,000PSI)
Control	: Digital
Overload Protection	: With
Dimensions	: 515x530x795mm
Net Weight	: 29.6kg(65.26 Lbs)

### Standard Accessories:

- \* Hose 1/4"x54'(16.5m)
- \* Gun with Tip Guard and Tip(0.017in.)
- \* Pump Filter w/one each 60&100 screens
- \* Special Multi-Purpose Wrench
- \* Rigid Suction Tube
- \* Throat Seal Oil(100ml Squeeze Bottle)
- \* Tommy Bar

## ELECTRIC PISTON PUMP AIRLESS SPRAYER




Model	: PM039
Motor Type	: Brushless Motor
Power Input	: 1800W
Voltage	: 220V~60Hz
Max. Tip Size	: 0.039 in.
Max. Flow	: 6.4 l/min.(1.7gpm)
Max. Pressure	: 227 Bar(3300 PSI)
Control	: Digital
Overload Protection	: with
Dimensions	: 670x580x810mm
Net Weight	: 61.1 kg(134.7 Lbs)

### Standard Accessories:

- \* Hose 3/8"x50'(15.5m)+ Whip Hose 1/4"x1.5M
- \* Gun with Tip Guard and Tip (0.035 in.)
- \* Inlet Strainer 20 Mesh
- \* Pump Filter w/one each 60&100 Screens
- \* Special Multi-Purpose Wrench
- \* Throat Seal Oil (100ml Squeeze Bottle)
- \* Tommy Bar



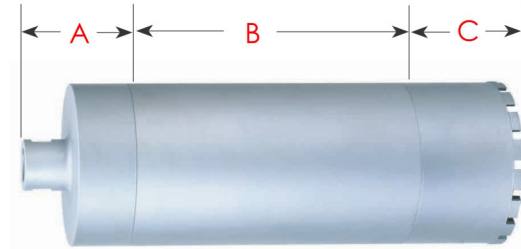

**A:** Coupling only    **B:** Tube only    **C:** Diamond Bit only

### 3-Section Wet Type Diamond Core Bit

OUTSIDE DIAMETER	BIT						TUBE		COUPLING		WHOLE SET	
	mm( Inch )	Teeth	thickness	Height	Width	Length	Art. No.	Length	Art. No.	Length	Art. No.	Art. No.
25 (1")	5	4.5	8.5	12.5	30	Z1-C	280	Z1-B	-	Z1-A-1	310	Z1-D-1
32( 1-1/4")	6	4.5	8.5	12.5	30	Z114-C	280	Z114-B	-	Z114-A-1	310	Z114-D-1
38(1-1/2")	7	4.5	8.5	12.5	35	Z112-C	270	Z112-B	-	Z112-A-1	305	Z112-D-1
51(2")	8	4.5	9.5	15	35	Z2-C	270	Z2-B	40	Z2-A-1	345	Z2-D-1
75( 3")	12	4.5	9.5	15	40	Z3-C	270	Z3-B	40	Z3-A-1	350	Z3-D-1
102(4")	13	4.5	9.5	20	70	Z4-C	270	Z4-B	40	Z4-A-1	380	Z4-D-1
126(5")	15	4.5	9.5	20	90	Z5-C	270	Z5-B	40	Z5-A-1	400	Z5-D-1

### Dry diamond core bit M16-2.0


Parts No.	Size	Length
Z010	1"	290mm
Z011	1 1/4"	290mm
Z012	1 1/2"	290mm
Z013	2"	290mm
Z015	3"	290mm
Z017	4"	290mm



#### Adaptor

Parts No.	Thread
DM01000040	1-1/4" UNC TO 1-1/4' - M16 - 2.0



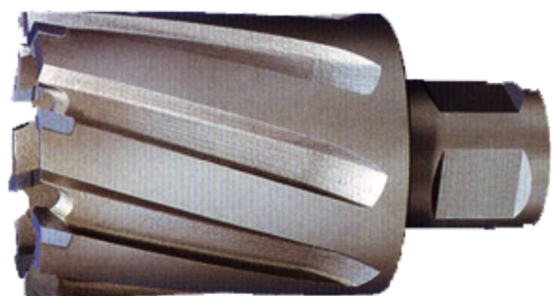

# AGE®

*Made in Taiwan*

## HC35 type tungsten carbide tipped hole cutters

Size (mm)

14
16
19
20
22
23
25
27
29
30
32
33
35
<b>Pilot Pin for 35mm(L) cutter</b>

## HC50 type tungsten carbide tipped hole cutters

Size (mm)

16
19
20
22
23
27
29
30
32
33
35
38
41
48
50
64
<b>Pilot Pin for 50mm(L) cutter</b>