

CORDED TOOLS

AG9-100

100mm Angle Grinder

Power Input	900W
Disc diameter	100 mm
No-load speed	11,000 rpm
Small Girth Size	207 mm
Weight	2.0kg



AG10-100

100mm Angle Grinder

Power Input	1000W
Disc diameter	100 mm
No-load speed	11,000 rpm
Spindle thread	M10
Cutting depth max.	15mm
Weight	2.1kg



AGV12-125XPD

125mm Angle Grinder

Power input	1200W
Disc diameter	125 mm
No-load speed I./ II.	11,000 rpm
Spindle diameter and thread	M 14
Max. cutting depth	31 mm
Weight	2.4 kg



AG22-180

180mm Angle Grinder

Disc diameter	180mm
Max. cutting depth	43mm
No load speed	8500 rpm
Power input	2200W
Sound power level	105.5 dB(A)
Spindle size	M 14
Weight	5.1 kg



DG30E

500W Variable Speed Single Hand Die Grinder

Power input	500W
Collet	6 mm
No-load speed I./ II.	10,000 - 30,000 rpm
Max. grinding wheel diameter (at 80 m/sec)	40 mm
Max. grinding wheel diameter (at 45 m/s)	20mm
Weight	1.3 kg



HDE 13 RQD

13mm 1-speed Drill Spade Handle

Power Input	825W
Drilling speed(full load)	0-355 rpm
Drill dia. in steel / aluminum / wood	13 / 20 / 38mm
No-load speed	0-500 rpm
Tool reception	1.5-13 mm
static stalling torque	101 Nm
Weight	3.2kg



B2E 16 RLD

16mm 2-speed Drill Spade Handle

Power Input	900W
Drilling speed(full load)	100-450/300-1000 rpm
Drill dia. in steel / aluminum / wood	16/20/40 mm
No-load speed 1st/ 2nd/ 3rd/ 4th gear	0-750/0-1600 rpm
Tool reception	3-16 mm
static stalling torque	88/58 Nm 1./2. gear
Weight	4.2kg



B 4-32

32mm Drill

Power Input	1050W
Drilling speed(full load)	115/160/190/260 rpm
Drill dia. in steel / aluminum / wood	32/64/52 mm
No-load speed 1st/ 2nd/ 3rd/ 4th gear	220/260/350/420 rpm
Tool reception	MK 3 mm
static stalling torque	> 200 Nm
Weight	9.7kg



TKSE 2500 Q

Tech Gun

Power Input	725W
Self-tapping / wood screws	6.5 / 6 mm
No load speed	0-2500 rpm
Bit reception	1/4"
Max. stalling torque	25 Nm
Weight	1.4kg



MD 4-85

32mm Magnetic Drill Press

Nominal power consumption of the driving motor	1050 W
Full-load speed max.	115/160/190/260 rpm
Stroke	220 mm
Drill diameter max. with core hole drill bit	85 mm
Material thickness max.	50 mm
Weight	28 kg



DD 2-160 XE

2-speed Dry Diamond Drill

Power Input	1500W
No-load speed	0-1500 / 0-3000 rpm
Drilling speed(full-load)	0-890 / 0-1,770 rpm
Impacts	24000 / 48000 rpm
Spindle diameter and thread	M 18
Chuck capacity	162 mm (max)
Gear neck diameter	57 mm
Weight	4.2 kg



DCM 2-350 C + DR 350 T

Diamond Drilling Motor + Aluminum Rig

Power input	2800W
No-load speed 1st / 2nd/3rd / 4th gear	300 / 600 rpm
Coring capacity 1st gear	178 - 356 mm
Coring capacity 2nd gear	102 - 178 mm
Arbor reception	1 1/4"x7 UNC
Weight	9.0 kg




PD705 705W Impact Drill

Power input	705W
No-load speed	0-3,000rpm
Static Stalling torque	13.8 Nm
Max. drill capacity in wood/steel	15/16mm
chuck(keyed)	30/13mm
Weight	1.5-13mm
	1.9kg




KANGO 545 S 45mm Rotary Hammer SDSmax 12J

Power Input	1300W
Impact energy per stroke	12 J
Drilling dia. in concrete	45 mm
Drilling diameter with tunnel bit	65 mm
Drilling speed (full-load)	450 rpm
Drilling speed soft-hammer mode (full-load)	350 rpm
Blow rate (full-load)	2840 bpm
Blow rate soft-hammer mode (full-load)	2200 bpm
Tool reception	SDS-Max
Weight	6.7 kg




SB 2-35 D 40mm 2-Speed Percussion Drill Spade Handle

Power Input	1010W
Drill dia. in concrete / stone	35 / 40 mm
Drilling dia. in steel / wood	16 / 50 mm
Full-load speed 1st / 2nd gear	650 / 1350 rpm
No-load speed 1st / 2nd / 3rd / 4th gear	800 / 1800 rpm
Tool reception	3-16 mm
Weight / Efficiency	4.2kg / 50%
Voltage / Amps	220-230V AC / 4.9 A
Static stalling torque	3-16 mm
Stalling torque / Nominal torque	88/67 Nm 1./2. gear / 10/4.7 Nm 1./2. gear



KANGO 750 S 50mm Rotary Hammer SDSmax 16J

Power Input	1550W
Impact energy per stroke	16 J
Drilling dia. in concrete	50 mm
Drilling diameter with tunnel bit	80 mm
Drilling diameter with core cutter	150 mm
Drilling speed (full-load)	300 rpm
Drilling speed soft-hammer mode (full-load)	240 rpm
Blow rate (full-load)	2740 bpm
Blow rate soft-hammer mode (full-load)	2180 bpm
Tool reception	SDS-Max
Weight	8.2 kg




PFH24E 670W Pistol Type Rotary Hammer

Blow energy	1.9J
Full load hammer action	0 - 3700 bpm
Full load speed (soft hammer)	0 - 850rpm
Max. drilling masonry	24mm
Max. drilling steel	13mm
Max. drilling wood	30mm
Power input	670W
Supplied in	Kitbox
Vibration drilling	15.5m/s ²
Weight	2.4kg




KANGO 950 S 50mm Rotary Hammer SDSmax 27J

Power Input	1700W
Impact energy per stroke	27 J
Hammer rate under load	975 - 1.950 bpm
Drilling speed (full-load)	125 - 250 rpm
Drilling diameter in concrete and stone	28 - 50 mm
Drilling diameter with core cutter	45 - 150 mm
Drilling diameter with tunnel bit	50 - 80 mm
Weight according EPTA-Procedure 01/2003	11.8 kg
Tool reception	SDS-max




PLH 20 20mm Rotary Hammer SDS+1.7J

Power Input	620W
Max drilling capacity: concrete/wood/steel	20 / 30 / 13 mm
Full-load speed max.	0-2700 rpm
Full load hammer action	0-4400 rpm
Impact energy per stroke	1.7 J
Weight according	1.9 kg
No-load speed I. / II.	0-3.700 rpm
Tool reception	SDS-plus
Vibration (3-axis)	10.2 m/s ²




KANGO 950 K 50mm Rotary Hammer Hex 27J

Power Input	1700W
Impact energy per stroke	27 J
Hammer rate under load	975 - 1950 bpm
Drilling speed (full-load)	125 - 250 rpm
Drilling diameter in concrete and stone	28 - 50 mm
Drilling diameter with core cutter	45 - 150 mm
Drilling diameter with tunnel bit	50 - 80 mm
Weight	11.8 kg
Vibration level (3-axis) drilling into concrete / breaking	12.5 / 11.0 m/s ²
Tool reception	21mm Hex




PLH 26E 26mm Rotary Hammer SDS+3.3J

Power Input	770W
Impact energy per stroke	3.3 J
Drilling dia. in concrete / wood / steel	26 / 30 / 13 mm (max)
Drilling diameter with core cutter	68 mm (max)
Drilling speed (full-load)	0 - 1050 rpm
Blow rate (full-load)	0 - 4500 bpm
Weight	3.1 kg
Tool reception	SDS-plus




PCE 3 3kg SDS-PLUS Chipping Hammer

Blow energy :	3.6J
Full load hammer action	0 - 3650bpm
Power input	720W
Vibration chiseling	11m/s ²
Vibration chiselling uncertainty	1.5m/s ²
Weight	3.7kg
Sound power level	98(dB(A))
Sound power level uncertainty	3(dB(A))
Sound pressure level	87(dB(A))
Sound pressure level uncertainty	3(dB(A))



PLH 28XE 3kg Fixtec Rotary Hammer

Weight	3.6kg
Power input	800W
No load speed	0-1500 rpm
Max. drilling steel	13mm
Max. drilling wood	40mm
Max. drilling concrete	28mm
Full load hammer action	0-4000 bpm
Full load speed	0-1000 rpm



KANGO 500 S 6.3kg Demolition Hammer 14J

Power Input	1300W
Impact energy per stroke	14 J
Blow rate (full-load)	2,840 bpm
Blow rate soft-hammer mode (full-load)	2,200 bpm
Tool reception	SDS-Max
Weight	6.3 kg



KANGO 900 S 11kg Demolition Hammer SDSmax 27J

Power Input	1600W
Impact energy per stroke	27 J
Hammer rate under load	975 - 1.950 bpm
Weight	11.0 kg
Tool reception	SDS-max



KANGO 900 K 11kg Demolition Hammer Hex 27J

Power Input	1600W
Impact energy per stroke	27 J
Hammer rate under load	975 - 1.950 bpm
Weight	11.0 kg
Tool reception	K-Hex




SSD1100X 28mm Sawzall

Power Input	1100W
Length of stroke	28 mm
No load stroke rate	0-2900 spm
Weight	3.2 kg




CHS 355 355mm Chop Saw

Power Input:	2300W
No load speed:	3800 rpm
Wheel diameter:	355 mm
Length/Height	528mm/609 mm
Cutting Disc Diameter:	355mm
Cutting Disc Thickness:	2.5mm
Cutting Disc Bore:	25.4mm
Max. cutting capacity 90°:	Square - 115mm x 115mm/Rectangular - 150mm x 70mm L-Shape - 130mm x 130mm/Rounded - 125mm
Max. cutting capacity 45°:	Square - 80mm x 80mm/Rectangular - 105mm x 70mm L-Shape - 70mm x 70mm/Rounded - 100mm




SCS65Q 190mm Circular Saw

Power Input	1900W
Cutting depth at 90° / 45°	65 / 52 mm
Saw blade dimension	190 / 30 mm
No-load speed I. / II.	5.800 rpm
Weight	5.5 kg



FSPE 110X Heavy Duty Body Grip Jigsaw

Power Input	730W
Cutting depth in wood / aluminium / steel	120 / 30 / 10 / 10 mm
Mitre cutting angle to	45°
No load stroke rate	500 - 3.000 rpm
Stroke	26 mm
Weight	2.5 kg
Orbital adjustment	4 - step



HBS120E Bandsaw

Power Input	1100W
SFPM	0-380/min
Length	21"
Weight	7.2kg



ROS150E-2 150mm Random Orbital Sander

No load speed :	4,000 - 10,000 rpm
Oscillation diameter :	6.4 / 3.2 mm
Power input :	440 W
Sanding pad size :	150 mm
Sound power level :	94.5 dB(A)
Sound pressure level :	83.5 dB(A)
Vibration level :	6.1 m/s ²
Weight :	2.8 kg



BS100LE 100x160mm Belt Sander

Power Input	1150W
Belt length	620 mm
Sanding surface	100 x 160 mm
Belt speed	230 - 400 m/min
Weight	5.3 kg



S2.5Q Plate Shear

Power Input	500W
Cutting capacity in steel plates of up to 400 / 600 / 800 N/mm ²	2.5 / 2.0 / 1.5 mm
Cutting capacity in aluminium up to 250 N/mm ²	3.0 mm
Max. cutting speed	5-7 m/min
Min. cutting radius	20 mm
Rated load strokes/minute	1350 rpm
Weight	2.2 kg



N2Q Nibbler

Power Input	500W
Cutting Capacity in steel plate up to 400 / 600 / 800N	2.0/ 1.5/ 1.0mm
In aluminium up to 250 N/mm sq.	2.5 mm
Max. cutting speed	1.3 m/min
Max. cutting radius	4 mm
Rated load strokes	1,200 rpm
Weight	1.9kg



M12 CORDLESS TOOLS

M12BPD-202C M12 3/8 Chuck Hammer Drill Set


Voltage (DC)	12V
No load speed gear 1	0 - 400 rpm
No load speed gear 2	0 - 1,500 rpm
Percussion rate	0 - 22,500 bpm
Chuck capacity	10 mm
Max. drilling capacity in steel / wood / masonry	10 / 22 / 10 mm
Max. torque	2.0 Ah 30 Nm
Weight with battery pack	2.0 Ah 1.2 kg



2 x 2.0Ah Battery + C12C

M12BID-202C M12 Impact Driver 1/4" Hex Chuck Set

Voltage (DC)	12V
No load speed	0 - 2,500 rpm
Impact rate	0 - 3,300 ipm
Tool reception	Double End STD.
Max. torque	112 Nm
Weight with battery pack	1.0 kg



2 x 2.0Ah Battery + C12C

M12BIW12-202C M12 1/2" Driver Compact Impact Wrench Set

Voltage (DC)	12V
No load speed	0 - 2,500 rpm
Impact rate	0 - 3,300 ipm
Tool reception	1/2" Square
Max. torque	138 Nm
Weight with battery pack	1.1 kg



2 x 2.0Ah Battery + C12C

M12 BPRT-202C

M12™ Rivet Tool

Rivet diam. range	2.4-4.8
Rivet materials	Aluminum, Copper, Steel, Stainless Steel
Nose tips (mm)	2.4/3.2/4.0/4.8
Max. pulling force(N)	9000
Stroke Length(mm)	20.3
Battery platform	M12™ REDLITHIUM™-ION
Voltage (V)	12
Weight w/ battery (kg)	2.1
Length(mm)	245
LED Light	Yes
FUEL Gauge	Yes



2 x 2.0Ah Battery + C12C

C12RT-0

M12 Rotary Tool (Bare Tool)

Voltage (DC)	12V
No-Load Speed	5,000-32,000rpm
Collect size	3.2mm
Weight w/o battery pack	0.4kg



C12MT-0

M12 Multi Tool (Bare Tool)

Voltage (DC)	12 V
Oscillating angle left/right	1.5°-1.5°
Delta sander no load oscillation frequency	5,000-20,000 min ⁻¹
weight w/o battery pack	0.8kg



C12HZ-0

M12 Hackzall (Bare Tool)

Voltage	12 V
No load oscillation rate	5,000 - 20,000 rpm
Speed Settings	12



M12JS-0

M12 Jigsaw (Bare Tool)

Voltage	12 V
Stroke rate under no-load	0-2800min ⁻¹
Length of stroke	19mm
Cutting depth max: Wood	40mm
: Aluminum	15mm
Weight	1.95kg



M12PCG

M12 Caulking Gun (Bare Tool)

Voltage	12V
Length	410mm
Weight	1.7kg
Dimension	60.8 x 28.6 x 11 cm



C12RAD-0

M12 Right Angle Drill (Bare Tool)

Voltage	12V
Peak Torque	100 in-lbs
Charge Time	30 Minutes
Chuck Type	3/8" Single Sleeve
Speed	0-800 RPM



M12 BRAID-0

12V Right Angle Impact Driver (Bare Tool)

Battery type	Li-ion
By technology new	Brushed
Impact rate (ipm)	0 - 3300
Max. fastening torque (Nm)	68
Max. torque (Nm)	68
No load speed (rpm)	0 - 2425
No. of batteries supplied	102.9
Sound pressure level (dB(A))	91.9
Sound pressure level uncertainty (dB(A))	3
Voltage (V)	12
Weight with battery pack (kg)	1.2



2471-20

M12 Copper Tubing Cutter (Bare Tool)

Voltage	12V
Length	14"
Weight	2.8 lbs
Speed	500rpm
Capacity	1/2" to 1-18"
Blade	Copper Cutting Wheel



2472-20

M12 600 MCM Cable Cutter (Bare Tool)

Voltage	12V
Length	10-1/2"
Weight	6.2 lbs
Blade	M12 600 MCM Cable Cutter Replacement Blade



48-44-0410

M12BS-0

M12 Cordless Band Saw (Bare Tool)

Voltage	12V
Length	300mm
SFPM	280
Blade Length	27" x 1/2" x .020"



M12 TD-0

Thermal Imager (Bare Tool)

Battery type	Li-ion
Charger supplied	-
IP protection class	54
No. of batteries supplied	0
Sensor resolution (pixels)	102 x 77
Supplied in	-
Temperature range (°C)	-10 - +330
Thermal sensitivity (°C)	0.1 at 30
Voltage (V)	12



M12BPS-0

M12 Spot Polisher (Bare Tool)

Pin	M9 x 0.75 mm
Disc diameter:	76 mm
Weight with battery	1.0 kg
Voltage:	12V
Polishing / Sanding	2.95m/s / 2.3 m/s
Load speed	2500/7500 rev / min
Load speed speed 1	0 to 2800 rev / min
Speed Load Speed 2	0 to 8300 rev / min



M12SL-0


M12 LED Light (Bare)

Voltage	12V
Length	9-1/4"
Weight	0.55 lbs
LED Light	Yes




M12LL-O M12 LED Light (Bare)

Adjustable beam	180-360°
Max. Light source	400 lumens
Brightness adjustment	4
Beam length:	23 m
Max. 4.0 Ah battery operating time	Up to 8 hours
Usb Charger	yes
Adjustable hanger hooks	2



M18BIW12-502C M18 Impact Wrench Set


Voltage (DC)	18V
No load speed	0-2,450 rpm
Tool reception	1/2" SD
Impact Rate	0-3,350 ipm
Max. Torque	240Nm



2 x 5.0 Ah Battery + M12-18C


M12 MLED-O M12™ LED high performance flashlight (Bare)

Battery type	Li-ion
Beam distance (m)	350
By technology new	Brushed
Max. light output High/Medium/Low/Strobe (Lumens)	800 / - / 325 / 800
Max. run time with M12 B4 battery (h)	5 / - / 7 / 7
Supplied in	Blister
System	M12
Voltage (V)	12
Weight with battery pack (kg)	0.7



C18HZ-O M18 Hackzall (Bare Tool)

Voltage	18 V
Stroke rate under no-load	0-3000min-
Length of stroke	20mm
Vibration cutting (m/s ²)	7.2
Vibration cutting uncertainty (m/s ²)	1.5
Weight	1.8kg



C12C Charger

System	M12™
Charging Time	
1.5Ah	30min.
3.0Ah	60min.
Battery type	Lithium-ion
Weight	0.5kg




HD18BS-O M18 Bandsaw (Bare Tool)

Voltage(DC)	18V
SFPM	480 sfpm
Cutting capacity rect. stock(wxh)	85x85mm
Switch type	on/off Trigger
Blade length	880mm
Weight with battery pack	4.8kg




M12B2 2.0Ah Red Li-ion

Voltage (DC)	12V
Capacity	2.0Ah
Battery type	Redlithium-ion
Weight	0.2kg



48-08-0260 Bandsaw Stand

Dimension	24.3 x 12.2 x 7 inches
Weight	37.7



M18 CORDLESS TOOLS

M18BPD-502C M18 Hammer Drill Driver Set

Voltage (DC)	18V
No load speed	0 – 450 / 0 – 1,800 rpm
(1st / 2nd gear)	13 mm
Keyless Chuck	
Max. Drilling capacity steel/wood/masonry	13 / 38 / 16 mm
Percussion rate	0 – 28,800 bpm



2 x 5.0 Ah Battery + M12-18C

HD18MS-502B M18 Metal Saw Set


Voltage (DC)	18V
No load speed	3,600 rpm
Saw Blade Ø	135mm
Bore Size	20mm
Maximum cutting capacity :	
Steel plate	1.6mm
Metal pipe	50mm
Sections	50mm
Weight with battery pack	2.6kg



2 x 5.0 Ah Battery + M12-18C

M18BID-502C M18 Impact Driver Set


Voltage (DC)	18V
No load speed	0-2,000 / 0-2,750 rpm
Tool reception	Double End STD.
Impact Rate	0-2,450/0-3,450 ipm
Max. Torque	180Nm



2 x 5.0 Ah Battery + M12-18C

M18BBL-O M18 Blower (Bare Tool)

Voltage	18V
Motor Type	4-Pole Frameless Motor
Air Velocity	72 m/sec
Air Volume	0.047 m3/sec
Fan Speed	0 - 18,700 rpm
Speed	3 Speed Electronic Switch
Trigger Type	Variable Speed Trigger
Battery Type	REDLITHIUM™
Weight (Tool only)	1.20 kg




O880-20 M18 Wet & Dry Vacuum (Bare Tool)


Voltage	18V
Weight	9.4 lbs
Height	11.5"
Width	19"
Max Air Flow	45 CU ft per min
Sealed Suction in Water	32 inch



M18 BMS20-0 M18™ Compact Metal Shear (Bare Tool)

By technology new	Brushed	
Max. cutting capacity aluminium (mm)	3.2	
Max. cutting capacity steel (mm)	2.0	
Minimum cutting radius (mm)	180	
No load speed (rpm)	0 - 2500	
Sound power level measured uncertainty (dB(A))	3,0	
Sound pressure level (dB(A))	78,2	
Vibration cutting of sheet metal [m/s²]	7,07	
Voltage (V)	18	
Weight with battery pack (kg)	2.6	

M18SLED-0 M18™ LED Search Light (Bare)

Spot Mode	600 Lumens 7 Hours	
Voltage	18V	
Battery	M18™ REDLITHIUM™	
Flood Mode	1,200 Lumens 4 Hours	
Spot Flood Mode	1,250 Lumens 4 Hours	
Strobe Mode	1,200 Lumens 5 Hours	
Length	328mm	
Weight	1.4kg	
Height	119mm	
Width	140mm	


M18B4 M18 Battery Pack 4.0Ah Li-ion

Voltage	18 V/4.0Ah	
Battery Type	Lithium-ion	
REDLINK™ intelligence	Yes	
Battery fuel gauge	Yes	
Weight	0.72kg	


M18HAL-0 M18™ LED High Performance Area Light (Bare)

High Mode	3,000 Lumens / 2 Hours	
Low Mode	650 Lumens / 9 Hours	
Voltage	18V	
Battery	M18™ REDLITHIUM™	
Length	532 mm	
Height	382 mm	
Width	135 mm	
Weight with Battery	7.8 Kg	

M18B5 M18 Battery Pack 5.0Ah Li-ion

Voltage	18 V/5.0Ah	
Battery Type	REDLITHIUM™	
Electronics	REDLINK™ intelligence	
Battery fuel gauge	Yes	
Weight	0.72kg	


M18SAL-0 M18™ LED Stand Light (Bare)

High Mode	2,000 Lumens / 4 Hours	
Medium Mode	1,300 Lumens / 6 Hours	
Low Mode	850 Lumens / 10 Hours	
Voltage	18V	
Battery	M18™ REDLITHIUM™	
Height	120cm to 220cm Height Adjustment	


M18B6 M18 Battery Pack 6.0Ah Li-ion

Voltage	18 V/6.0Ah	
Battery Type	REDLITHIUM™	
Electronics	REDLINK™ intelligence	
Battery fuel gauge	Yes	
Weight	725g	

M18UBL-0 M18 Utility Bucket Light (Bare)


Max. lumens	2,500/800/2,200	
Max. runtime	4/6/4 (B9)	
Focus trade	Power Utility	
Head rotation	180 Vertical & Horizontal	
Hands-free	Spring-Loaded Clamp	
IP rating	IP56	
Battery platform	M18™ REDLITHIUM™-ION	
Voltage	18V	

M18HB12 M18 Battery Pack 12.0Ah Li-ion

Voltage	18 V/12.0Ah	
Battery Type	High Output	
Platform	M18™	
Weight	1.6kg	

M18 FUEL CORDLESS TOOLS GEN I

M12-18FC Rapid Charger

Compatible Battery	M12™ and M18™	
Charge Time	26 / 47 / 59 / 68 / 95 min	

M18CID-502C M18 Fuel Impact Driver Set

Torque (Nm)	23 / 79 / 180	
No load speed (Rpm)	850 / 2100 / 2900	
Impact rate (Ipm)	1750 / 2850 / 3600	
Tool reception	1/4" HEX	
Speed/Torque Control	3 Speed DRIVE CONTROL™	
Electronics	REDLINK PLUS™	
Weight (tool only)	0.98kg	

2 x 5.0 Ah Battery + M12-18C

M18AL-0 M18 LED Light (Bare)


Voltage	18V	
Bulb Type	LED	
Packaged Weight (g)	1860	

M18CHX-502C M18 Fuel 26mm Fixtec SDS+ Hammer Set

Voltage	18 V	
Battery	2 x 5.0 Ah Li-ion	
Impact energy:	2.5 J	
Max. Drilling diameter in concrete	26 mm	
Weight with battery	3.5 kg	

2 x 5.0 Ah Battery + M12-18C

M18AF-0 M18 Fan

Battery : M18™ REDLITHIUM™-ION		
Height: 357mm	Length: 261mm	
Max Air Flow: 284 CFM (29 km/h)		
No Load RPM: High – 2350 RPM,	Med – 1900 RPM,	
	Low – 1370 RPM	
Type: Cordless		
Voltage: 18V		
Weight: 2.32kg	Width: 182mm	

M18CHPX-502C M18 Fuel 28mm Fixtec SDS+ Hammer Set

Voltage	18 V	
Battery	2 x 5.0 Ah Li-ion	
Impact energy:	4.5 J	
Max. Drilling diameter in concrete	28 mm	
Weight with battery	4.3 kg	

2 x 5.0 Ah Battery + M12-18C

M18CHM-902C

M18 SDSMAX Rotary Hammer

Voltage 18 V/9.0Ah
 Battery Type REDLITHIUM™
 Max. Capacity 40mm
 Impact Energy 6.1 Joule
 Weight 5kg



2 x 9.0 Ah Battery + M12-18C

M18CCS66-0

7-1/4 Fuel Cir. Saw Tool (Bare Tool)

Battery type Li-ion
 Blade diameter (mm) 190
 Bore size (mm) 30
 By technology new Fuel
 Max. cutting depth 45° (mm) 48
 Max. cutting depth 90° (mm) 66
 No load speed (rpm) 5000
 Sound power level (dB(A)) 94.2
 Sound pressure level (dB(A)) 83.2
 Voltage (V) 18



M18 CAG125X-0

M18 Fuel 125mm SAG with Fixtech (Bare)

Voltage 18V
 Disc Diameter 125mm (5")
 No Load Speed 8,500 RPM
 Overload Protection REDLINK PLUS™ Intelligence
 Max. cutting depth 33mm
 Spindle Thread M14
 Weight (tool only) 1.72kg



M18CSX-0

M18 Fuel Sawzall (Bare Tool)

Voltage 18V
 Motor Type POWERSTATE™ brushless
 Strokes per min. 0 - 3,000spm
 Stroke Length 29mm (1 1/8")
 Electronic Clutch YES
 Overload Protection YES
 Blade Clamp QUIK-LOCK® Universal
 Weight (tool only) 3.41kg



M18CBS125-0

M18 Fuel Bandsaw (Bare)

Voltage 18V
 Motor type POWERSTATE™ Brushless
 Max Cut Capacity 127 mm x 127 mm
 Speed 0 - 116 m/min
 Armor Technology Yes
 Hanging Hook Yes
 Battery Type REDLITHIUM™
 Weight (Tool only) 6.26 kg



M18 FUEL CORDLESS TOOLS GEN II

M18FPD-502C AZN

M18 Fuel Gen 2 Compact Percussion Drill

Voltage 18V
 No Load Speed Gear 1 0-550 rpm
 No Load Speed Gear 2 0-2000 rpm
 Max. Percussion Rate 0-32000 bpm
 Max. Torque 135 Nm
 Chuck Capacity 13 mm
 Max Drilling (Wood):(Steel):(Masonry) 65mm : 13mm : 16mm
 Tool Weight (with 5.0Ah) 2.4 kg
 LED Light Yes



M18FQID-502FC

M18 FUEL™ SURGE™ 1/4" Hex Hydraulic Driver Kit

Voltage (DC) 18V
 Battery M18™ REDLITHIUM™
 Charger M18™ and M12™ Multi-Voltage Rapid Charger
 Length 127mm
 LED Light Yes
 Peak Torque 50 Nm
 No Load Speed 0-900 / 0-2,100 / 0-3,000 / 0-3,000 RPM
 No Lad IPM 0-1,800 / 0-2,900 / 0-3,700 / 0-3,700
 Tool Reception 1/4" Hex Single End Bit
 FUEL Gauge Yes
 Speed Setting 4
 Weight with Battery 1.7kg



M18FAP180-502X

M18 Fuel Polisher Kit Set

No load speed : 360 - 2,200 rpm
 Voltage : 18 volt
 Battery pack capacity : 5.0 Ah
 Battery type : Li-ion
 Supplied in : HD Box
 Charger supplied : 59 min
 No. of batteries supplied : 2
 Spindle size : M14
 Variable speed : Yes
 Weight (with battery pack) : 2.2 kg
 Line lock out function : Yes
 Disc diameter : 180 mm
 Soft start function : Yes



M18 ONEFHIWF34-502X

M18 Fuel Impact Wrench Set 3/4" Drive

Battery pack capacity : 5.0 Ah
 Battery type : Li-ion
 Charger supplied : 59 min
 Impact rate : 0-850 / 0-1,850 / 0-2,400 / 0-2,400 ipm
 Max. bolt diameter : M33
 Max. fastening torque : 1,627 Nm
 No load speed : 0-800 / 0-1,300 / 0-1,800 / 0-1,800 rpm
 No. of batteries supplied : 2
 Nut-busting torque : 2,034 Nm
 Supplied in : HD Box
 Voltage : 18 volt
 Weight (w/battery pack) : 3.5 kg



M18 ONEFHIWF1-122FC

M18 FUEL™ 1" High Torque Impact Wrench

Torque (Nm) 530/1020/1800/2033
 No load speed(rpm) 0-1000/1100/1400/1650
 Nut-busting torque(Nm) 2400
 Impact rate(ipm) 0-1330/1620/2100/2450
 Max. bolt diameter(mm) M42
 Battery platform M18™ REDLITHIUM™-ION
 Voltage(V) 18
 Weight w/battery(kg) 5.9
 Length(mm) 277
 LED Light Yes
 FUEL Gauge Yes



2 x 12.0 Ah Battery + M12-18FC

M18FMDP-502C


M18 Permanent Magnetic Drill Press

No load speed (rpm) 400 / 690
 Voltage (V) 18
 Battery pack capacity (Ah) 5.0
 Battery type Li-ion
 Charger supplied 59 min
 No. of batteries supplied 2
 Max. drilling solid bit (mm) 13
 Weight with battery pack (kg) 13.0
 Max. diameter broaching capacity (mm) 38
 Max. depth broaching capacity (mm) 50
 Stroke length (mm) 146



M18FMS254-0 M18 Fuel Dual Bevel Slide Compound Miter Saw (Bare Tool)

RPM	4,000
Voltage	18V
Battery	M18™ REDLITHIUM™
Max Miter Capacity	50 and 60
90 Cross Cut Capacity	50 x 305mm
45 Miter Cross Cut Capacity	50 x 203mm
45 Bevel Cut Capacity	50 x 305mm
Length	754mm
Weight	20kg
Arbor Size	30mm
Blade	254mm



MSL 2000 Universal Miter Saw Stand


Base size :	1,093mm
Bearing force :	227kg
Collapsed size :	1,093mm
Extendable up to :	2542mm
Height :	860mm
Weight :	14.0kg



JOBSITE ACCESSORIES


48-22-8200 Backpack

- Impact Resistant Molded Base - Protects contents and allows backpack to stand up
- 35 Pockets for organizing tools
- 1680 Ballistic Material
- Load-Bearing Harness- Padded and Breathable for all day comfort
- Laptop Sleeve - Holds Laptops up to 15.6"
- Bulk Pocket - Quick access to bulks items such as fish tapes and power tools
- Attachment Strap - Allows bag to be easily and securely attached to vertical handles




48-22-6117 Magnetic Tape Measure (8M/26FT) Tradesman

- Nylon Coating
- 4-Point Reinforced Frame
- Shock Resistant



48-22-6626 8M/26FT Compact Tape Measure Compact

- Nylon bond blade protection
- 5-Point reinforced frame
- Fractional Scale
- Optimized hook designed for scoring
- Stamped steel belt clip
- Lanyard ready



48-22-5225 8M/26FT Magnetic Taper Measure Premium

Length	91mm
Tape Blade Length	8m/26ft
Tape Blade With	27mm
Width	46.5mm
Height	85mm
Weight	0.5kg









48-22-3731 (12) INKZALL™ Black Liquid Paint Marker

Length	: 6.09"
Width	: 0.79"
Height	: 0.93"
Weight	: 0.06 lbs



48-22-3100 36PK INKZALL™ Fine Point Black Marker

- Clog Resistant Marker Tip
- Writes through Dusty, Wet and Oily Surfaces
- Durable Marker Tip for Writing on Concrete, OSB and Rough Surfaces
- Built-In Hard Hat Storage Clip
- Fine Point
- Ink Dries in Seconds
- Lanyard Hole
- Anti-Roll Body Design
- Non-Toxic Ink



48-22-3170 36PK INKZALL™ Red Fine Point Marker


- Clog Resistant Marker Tip
- Writes through Dusty, Wet and Oily Surfaces
- Durable Marker Tip for Writing on Concrete, OSB and Rough Surfaces
- Built-In Hard Hat Storage Clip
- Ink Dries in Seconds
- Lanyard Hole
- Anti-Roll Body Design
- Non-Toxic Ink



HAND TOOLS


48-22-4012 Left Cutting Offset Snips

Length	10"
Cutter Head	Forged
Thumb Lock	Yes
Cold Rolled Steel	18ga
Stainless Steel	22ga



48-22-4022 Right Cutting Offset Snips

Length	10"
Cutter Head	Forged
Thumb Lock	Yes
Cold Rolled Steel	18ga
Stainless Steel	22ga



48-22-3079 Gen II Combination Wire Plier

Length	7.75"
Weight	0.64 lbs
Width	0.67"
Height	2.03"



48-22-6109 Wire Stripper/Cutter for Solid & Stranded Wire

Length	7.12"
Weight	0.40 lbs
Width	0.56"
Height	2.28"




48-22-7314 Cheater Pipe Wrench

Length	21.80"
Weight	6.60 lbs



48-22-4252 1-1/2" Constant Swing Copper Tubing Cutter

Length	7"
Width	1.7"
Height	2.8"
Weight	1.25 lbs



48-22-1960

Snap Knives-9mm

Length : 5-5/8"
 Auto-Lock Slide-Fast blade adjustments
 Microcarbide Blade- Up to 2x Longer Blade Life
 Detail Cut Blade- Up to 50% Sharper
 Overmolded Handle
 Snap-Off Cap- Pocket clip snaps off blade segments
 Acetone Resistant
 13 Point Blade



48-22-1961

Snap Knives-18mm

Length : 6"
 Metal Lock- Up to 4x Longer Life
 Speed Thread- 2x Faster Blade Adjustment
 Microcarbide Blade- Up to 2x Longer Blade Life
 Detail Cut Blade- Up to 50% Sharper
 Overmolded Handle
 Acetone Resistant
 8 Point Blade



48-22-1962

Snap Knives-25mm

Length : 7"
 Metal Lock- Up to 4x Longer Life
 Speed Thread- 2x Faster Blade Adjustment
 Microcarbide Blade- Up to 2x Longer Blade Life
 Detail Cut Blade- Up to 50% Sharper
 Overmolded Handle
 Acetone Resistant
 7 Point Blade



48-22-1915

Safety Knife

Length : 5-3/4"
 Self-retract mechanism: Retracts blade when the button is released
 Two blade positions: Lets you control cutting depth
 Blade storage: Holds up to 5 blades conveniently inside the handle
 Tool-free blade change: Saves time and adds convenience with easy thumb-screw access
 Durable all-metal body: Withstands jobsite abuse
 Wire stripper: Cuts up to 10-gauge wire



48-22-1990

Fastback Flip Knife

·Press and flip operation: Permits one-handed opening
 ·Stainless steel drop-point blade: Resharpenable edge for long-lasting use
 ·Liner lock: Secures the blade in the open position
 ·Slim, compact body: Stores easily yet withstands jobsite abuse
 ·Piercing tip: Allows controlled piercing and smooth cutting
 ·Lanyard hole: Permits safe, convenient storage on a lanyard
 ·Reversible wire-form belt clip: Secures to your pants for quick access without damaging the fabric



48-22-4256

2 pc Replacement Cutter Wheels

·Designed for use with Milwaukee Mini and Constant Swing Copper Tubing Cutters
 ·Two Pack
 ·High Carbon Steel Blades
 ·Optimized for Copper



48-22-4257

3 pc Replacement Reaming Blades

·Designed for use with Milwaukee Constant Swing Copper Tubing Cutters
 ·Three Pack
 ·Heat Treated
 ·Black Oxide Blade



48-22-1010

Staple & Nail Gun

Length 7.5"
 Weight 2.61lbs
 Up to 75% More Driving Power
 Hi/Low power switch for driving control
 Tilt & Fire Mechanism-Fully drive staples at an angle
 Integrated Stapler Puller



CHISELS



	CODE	DESCRIPTIONS
	4932343735	SDS-Max Pointed Chisel 400mm
	4932343738	SDS-Max Flat Chisel 400 x 25mm
	4932343740	SDS-Max Hollow Chisel 300 x 26mm
	4932343746	SDS-Max Wing Chisel 380 x 35mm
	4932399251	21mm K-HEX Point Chisel 380mm
	4932399256	21mm K-HEX Flat Chisel 25 x 380mm

BANDSAW BLADES




Features

Fast cutting: Precision-formed teeth create fast, clean cuts

Exceptional durability: Matrix II high-speed steel teeth excel in metal-cutting applications


Long life: Alloy backing steel extends blade life

Versatile: Designed for cutting common materials 5/32" - 3/16" thick and very hard materials 3/16" - 5/16" thick

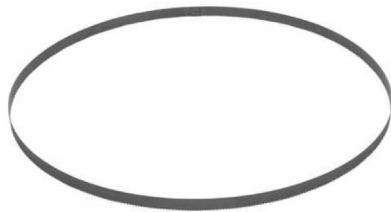

BI METAL BAND SAW BLADE

Part Number	Type	Fit with	Blade Dimension	TPI	Qty/pack
48-39-0521	DEEP / Std	AC / M18 Fuel	44-7/8" x 1/2" x .020"	18	3

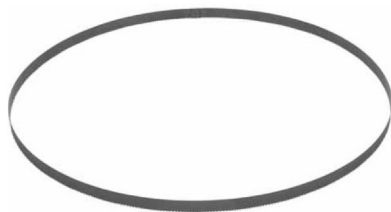

COMPACT PORTABLE BAND SAW BLADE

Part Number	Type	Fit with	Blade Dimension	TPI	Qty/pack
48-39-0529	Compact	M18	35-3/8" x 1/2" x .020"	18	3
48-39-0539	Compact	M18	35-3/8" x 1/2" x .020"	24	3
48-39-0572	Sub-Compact	M12	27" X 1/2" X .020"	18	3



Code	Image	Description	Package Quantity	Application
48-00-1450		9" TORCH DIAMOND GRIT SUPER SAWZALL BLADE	1PC/PACK	CAST IRON, GLASS, TILES, BRICKS, ABRASIVE MATERIALS
48-00-5706		9" 8TPI WRECKER SUPER SAWZALL BLADE	5PCS./PACK	GENERAL PURPOSE, METAL, WOOD, PVC, MULTI-MATERIAL
48-00-5711		12" 8TPI WRECKER SUPER SAWZALL BLADE	5PCS./PACK	GENERAL PURPOSE, METAL, WOOD, PVC, MULTI-MATERIAL
48-00-5713		9" 10TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 3/8"-9/16" THICKNESS
48-00-5787		9" 14TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/4"-7/16" THICKNESS
48-00-5788		9" 18TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/8"-5/16" THICKNESS
48-00-5790		9" 24TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/16"-3/16" THICKNESS
48-00-5714		12" 10TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 3/8"-9/16" THICKNESS
48-00-5794		12" 14TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/4"-7/16" THICKNESS
48-00-5789		12" 18TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/8"-5/16" THICKNESS
48-00-5791		12" 24TPI TORCH SUPER SAWZALL BLADE	5PCS./PACK	METAL, PIPES, STRUCTURAL STEEL, BARS, 1/16"-3/16" THICKNESS

GOING BEYOND JUST TOOTH DESIGN



INDUSTRY FIRST TANG AND BODY STRENGTHENING DESIGNS

OVER 2X LIFE VS CURRENT



TOOTH FORM OPTIMIZED FOR SPEED








TOOTH FORM AND EDGE WIRE OPTIMIZED FOR DURABILITY



Nothing but **HEAVY DUTY.**

Made in Germany

Milwaukee Hackzall Blade

Model Number	Image	Description	Package Qty	Application
49-00-5310		5PK 3-1/2"10TPI HAC BL WOOD SC	5	Wood Scroll
49-00-5324		5P 3-1/2"24TPI HAC BL METAL SC	5	Metal Scroll
49-00-5410		5PK 4"HACKZ BL MULTI MATERIAL	5	Multi-Material
49-00-5456		3" SCRAPER BLADE	1	Scraper
49-00-5450		GROUT REMOVAL TOOL	1	Carbide Grit Grout Removal



Nothing but **HEAVY DUTY.**

MILWAUKEE DIAMOND CORE BITS

WET CORING

1-1/4" UNC Core Reception

MODEL NR.	Code	Outer Diameter	Working Length	Total Length
4932399712	WCHP102	102mm	420mm	500mm
4932399179	WCHP 202	202mm	420mm	500mm



DRY CORING


1-1/4" UNC Core Reception

MODEL NR.	Code	Outer Diameter	Working Length	Total Length
4932399753	DCHXL 38	38mm	420mm	490mm
4932399163	DCHXL 52	52mm	420mm	490mm
4932399165	DCHXL 82	82mm	420mm	490mm
4932399166	DCHXL 102	102mm	420mm	490mm
4932399169	DCHXL 127	127mm	420mm	490mm
4932399171	DCHXL 152	152mm	420mm	490mm





Nothing but **HEAVY DUTY.**

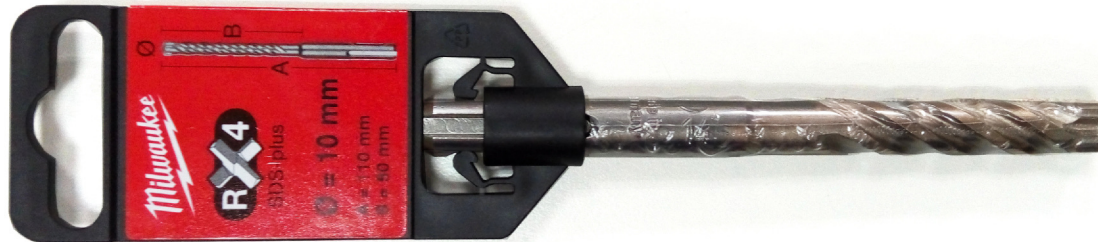

SDS+ DRILL BITS









MODEL #	DESCRIPTION
4932352009	Hammer Drill Bit SDS+RX4 5.5mm x 110mm -4 cutters
4932430134	Hammer Drill Bit SDS+RX4 6.5mm x 110mm -4 cutters
4932430146	Hammer Drill Bit SDS+RX4 6.5mm x 160mm -4 cutters
4932352029	Hammer Drill Bit SDS+RX4 10mm x 310mm -4 cutters
4932352034	Hammer Drill Bit SDS+RX4 12mm x 310mm -4 cutters
4932430136	Hammer Drill Bit SDS+RX4 13mm x 160mm -4 cutters
4932451992	Hammer Drill Bit SDS+RX4 13mm x 310mm -4 cutters
4932352037	Hammer Drill Bit SDS+RX4 14mm x 210mm -4 cutters
4932352954	Hammer Drill Bit SDS+RX4 16mm x 310mm -4 cutters
4932352820	Hammer Drill Bit SDS+RX4 16mm x 450mm -4 cutters
4932356504	Hammer Drill Bit SDS+RX4 20mm x 250mm -4 cutters
4932356505	Hammer Drill Bit SDS+RX4 20mm x 450mm -4 cutters
4932399333	Hammer Drill Bit SDS+RX4 25mm x 250mm -4 cutters

www.milwaukeetool.com



Nothing but **HEAVY DUTY.**

SHOCKWAVE
IMPACT DUTY 

MODEL #	DESCRIPTION	PRODUCT IMAGE
48-32-4511	SHOCKWAVE™ 6" Magnetic Bit Tip Holder	
48-32-4802	SHOCKWAVE™ 6" Impact Phillips #2 Power Bit	
48-32-4805	SHOCKWAVE™ 6" Impact Square Recess #2 Power Bit	
48-32-4808	SHOCKWAVE™ 6" Impact Phillips #3 Power Bits (Package Quantity:10pcs)	
48-32-4816	SHOCKWAVE™ 6" Impact Square Recess #3 Power Bits (Package Quantity:10pcs)	
48-32-4846	SHOCKWAVE™ 6" POWER BIT TORX T25 (Package Quantity:10pcs)	
48-32-4361	SCREW DRIVER IT 65mm PH2/PH2 Double End (Package Quantity:10pcs)	
48-32-4364	SCREW DRIVER IT 110mm PH2/PH2 Double End (Package Quantity:10pcs)	

HEX DRILL BIT 21mm



Code	Description
4932 3995 71	28 x 570 Hex Drill Bit
4932 3995 72	30 x 570 Hex Drill Bit
4932 3995 73	32 x 570 Hex Drill Bit
4932 3990 40	32 x 1320 Hex Drill Bit

2-Cutter SDSmax DRILL BIT



Code	Ø(D) mm	Working Length (L) mm	Total length (L) mm
4932 3527 50	12	200	340
4932 3527 51	12	400	540
4932 3527 52	14	200	340

4-Cutter SDSmax DRILL BIT



4932 3527 60	18	200	340
4932 3527 61	18	400	540
48-20-3932	19	381	533
4932 3527 64	20	200	320
4932 3527 65	20	400	520
4932 3527 68	22	200	320
4932 3527 69	22	400	520
4932 3527 72	24	200	320
4932 3527 73	24	400	520
4932 3527 74	25	200	320
4932 3527 75	25	400	520
4932 3527 79	28	450	570
4932 3527 86	32	450	570
4932 3527 87	32	780	920
4932 3527 88	32	1200	1320